



Neutron Module *Hp(10)*

For the DMC 3000 dosimeter



Nuclear
Power



Healthcare



Homeland
Security
& Defense



Labs and
Education



Industrial and
Manufacturing

OVERVIEW

The Neutron Module provides operational dosimetry for Military, First Responders and radiation workers where there is a Neutron radiation risk.

The add-on Neutron Module attaches to the DMC 3000 dosimeter and is able to measure *Hp(10)* radiation at a wide range of energy levels. The *Hp(10)* Neutron measurements, display and alarms are highly visible on the DMC 3000's LEDs and high contrast backlit LCD display.

Powered by the DMC 3000, the add-on module does not require any supplementary battery and remains operational over 2000 hours in continuous use. Calibration and functional parameters are stored in the module.

KEY FEATURES

- Dose and dose rate Neutron *Hp(10)* displayed
- Totalized dose for *Hp(10)* Gamma + Neutron displayed
- Superior gamma rejection in Neutron channel
- Connect and ready for use
- Full Neutron energy range coverage
- Meets or exceeds applicable IEC and ANSI standards
- Designed for ruggedness and durability
- Excellent EMC Immunity
- Waterproof IP67

RELATED PRODUCTS

- Telemetry module, Beta module
- Readers: LDM 2000, LDM 3200, LDM 320D, LDM 320W
- Software: DMCUser, DosiCare, DosiServ

PHYSICAL CHARACTERISTICS

- **Compliant with IEC 61526 Ed. 3, ANSI 42.20(*)**
(* isotropy 241Am and 137Cs with $\pm 75^\circ$ angle)
- **Measurement range Hp(10) (DMC 3000 + module)**
 - X and gamma energy range: 15 keV to 7 MeV
 - Neutron energy range : 0.025 eV to 15 MeV
- **Display range Hp(10) Neutron**
 - Dose : from 1 μ Sv to 10 Sv (0.1 mrem to 1000 rem)
 - Dose rate : from 100 μ Sv/h to 10 Sv/h (10 mrem/h to 1000 rem/h)
- **Accuracy Hp(10) Neutron**
 - $\leq \pm 10\%$ (AmBe, 0.75 mSv/h, 75 mrem/h)
 - Hp(10) Typical Energy response from thermal to fast Neutron (see curve)
- **Dose Rate Linearity Hp(10)**
 - $< \pm 20\%$ up to 10 Sv/h, 1000 rem/h
- **Display Neutron measurement Hp(10)**



ELECTRICAL CHARACTERISTICS

- Powered by DMC 3000
 - 8 calendar month battery life for Neutron module and DMC 3000 (typical, 8 h per day, 5 days per week in run mode, without excessive alarms)*
 - 2000 h battery life for DMC 3000 with Neutron module and DMC 3000 in continuous run, without excessive alarms*
- *0.2% of the time in alarm

MECHANICAL CHARACTERISTICS

- Rugged, high impact polycarbonate-ABS case
- Dimensions with DMC 3000:
 - 131 x 60 x 21 mm (5.1 x 2.4 x 0.8 in) max. without clip
 - 131 x 60 x 28mm (5.1 x 2.4 x 1.1 in) with standard clip
- Weight with DMC 3000: < 138 g (4.9 oz)
- Worn by a replaceable clip


ENVIRONMENTAL CHARACTERISTICS

- Temperature range: -10°C to 50°C (14°F to 122°F)
- Storage: -20°C to 71°C (-4°F to 160°F)
- Shock, vibration and drop resistant
- IP67 protection
- EMC: complies and exceeds standards by a large

- margin (CE compliant)
- MIL STD 461F RS103 (pulsed electric field): exceeds 200 V/m from 10 kHz to 5 GHz
- MIL STD 461F RS101 (magnetic field 30 Hz to 100 kHz)

PRODUCT CHARACTERISTICS

- **Histogram Features**
 - Additional Hp(10) Neutron measurement (dose, dose rate and maximum dose rate) saved on non volatile memory (EEPROM) at the same time as Hp(10) Gamma measurement in configurable steps (10 s, 60 s, 10 min, 1 hour, 24 hours)
- **Display Features**
 - Additional Hp(10) Neutron measurement displayed on DMC 3000 high quality white backlighting
 - Blue top LED for Neutron dose increment indication
- **Alarm Features and communication**
 - DMC 3000 alarming speaker, vibrator, high efficiency red flash LED, 3 top LEDs and display indicators
 - Hp(10) Neutron dose/rate alarms, adjustable over the display range
 - Hp(10) Neutron dose/rate warnings, adjustable over the display range and acknowledgeable
- **Calibration**
 - Factory calibration in accordance with ISO/IEC 17025
 - Parameters saved into the module
- **Compatibility**
 - Backward compatibility with LDM 2000 and LDM 3200 readers (requires reader firmware and software upgrade)
 - Compatible with LDM 320D/W
 - Compatible with DMC 3000 firmware V7.x (New communication protocol)

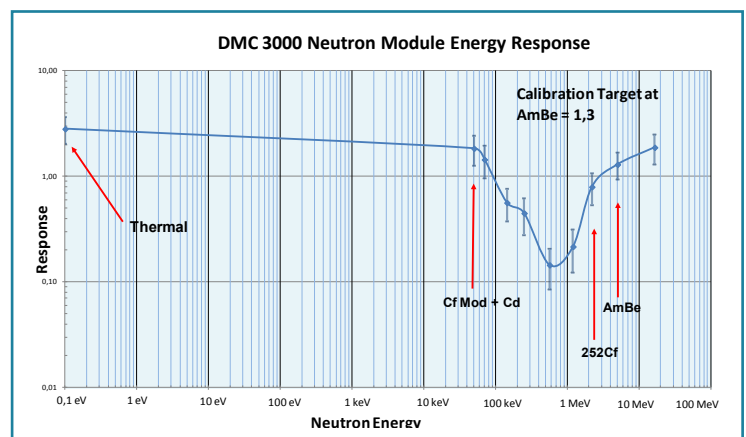

> CHINA - SHANGHAI
T: +86 21 6180 6920 | E: info-cn@mirion.com

> FINLAND - TURKU
T: +358 2 4684 600 | E: info-fi@mirion.com

> FRANCE - LAMANON
T: +33 (0) 90 59 59 59 | E: info-fr@mirion.com

> GERMANY - HAMBURG
T: +49 40 85193 0 | E: info-de@mirion.com

> USA - SMYRNA, GEORGIA
T: +1 770 432 2744 | E: info-us@mirion.com

Copyright (c) 2014 Mirion Technologies, Inc. or its affiliates. All rights reserved. Mirion, the Mirion logo, and other trade names of Mirion products listed herein are registered trademarks or trademarks of Mirion Technologies, Inc. or its affiliates in the United States and other countries. Third party trademarks mentioned are the property of their respective owners.