



DONGGUAN NANJING ELECTRONICS LTD.,

TO-92 Plastic-Encapsulate Transistors

C945 TRANSISTOR (NPN)**FEATURE**

- Excellent h_{FE} linearity
- Low noise
- Complementary to A733

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	60	V
V _{CEO}	Collector-Emitter Voltage	50	V
V _{EBO}	Emitter-Base Voltage	5	V
I _c	Collector Current -Continuous	150	mA
P _c	Collector Power Dissipation	400	mW
T _J	Junction Temperature	125	°C
T _{stg}	Storage Temperature	-55-125	°C

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =1mA, I _E =0	60			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C =100μA, I _B =0	50			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =100 μA, I _C =0	5			V
Collector cut-off current	I _{CBO}	V _{CB} =60V, I _E =0			0.1	μA
Collector cut-off current	I _{CEO}	V _{CE} =45V, I _B =0			0.1	μA
Emitter cut-off current	I _{EBO}	V _{EB} =5V, I _C =0			0.1	μA
DC current gain	h _{FE(1)}	V _{CE} =6V, I _C =1mA	70		700	
	h _{FE(2)}	V _{CE} =6V, I _C =0.1mA	40			
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =100mA, I _B =10mA			0.3	V
Base-emitter saturation voltage	V _{BE(sat)}	I _C =100mA, I _B =10mA			1	V
Transition frequency	f _T	V _{CE} =6V, I _C =10mA, f=30MHz	200			MHz
Collector output capacitance	C _{ob}	V _{CB} =10V, I _E =0, f=1MHz			3.0	pF
Noise figure	NF	V _{CE} =6V, I _C =0.1mA R _G =10kΩ, f=1MHz			10	dB

CLASSIFICATION OF h_{FE(1)}


Rank	O	Y	GR	BL
Range	70-140	120-240	200-400	350-700

TO-92

1.EMITTER








2.COLLECTOR

3. BASE





Typical Characteristics

C945

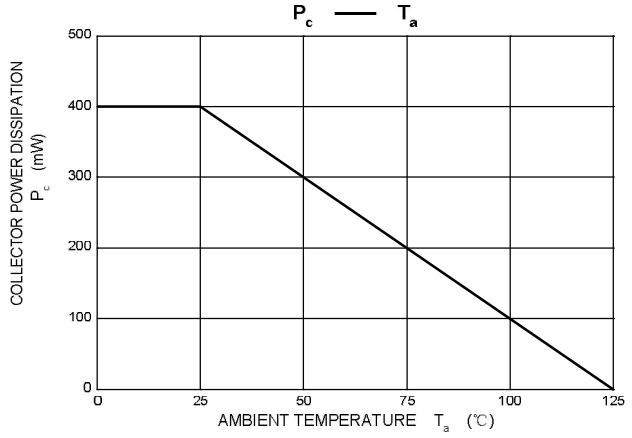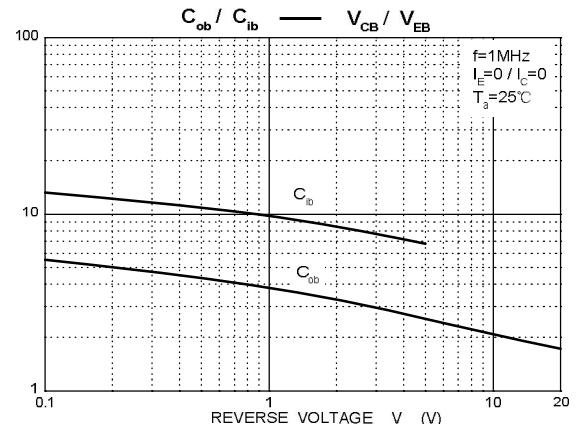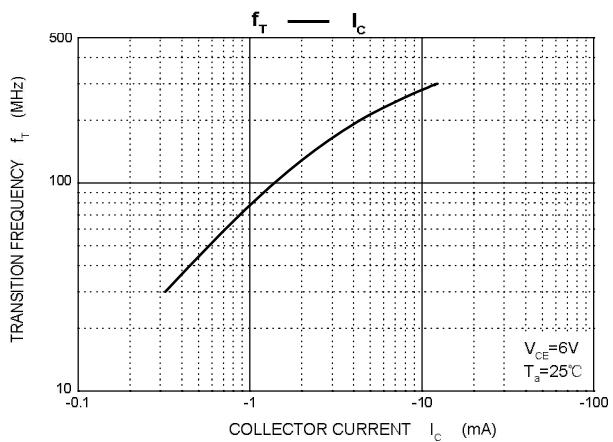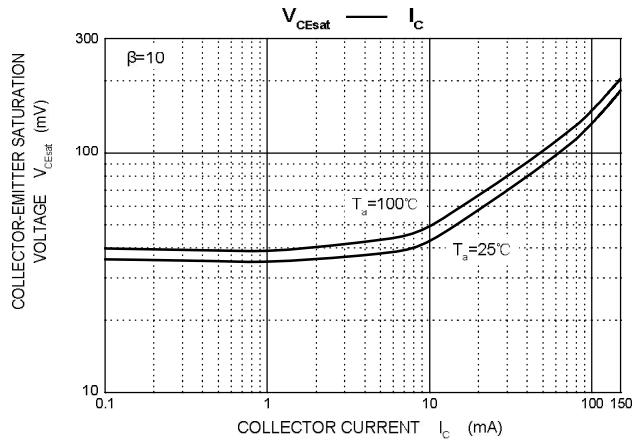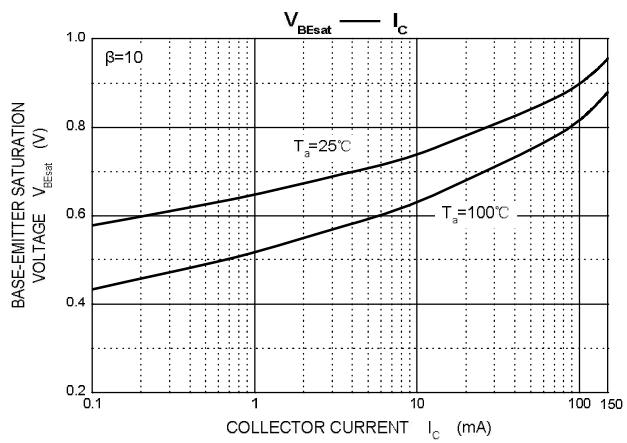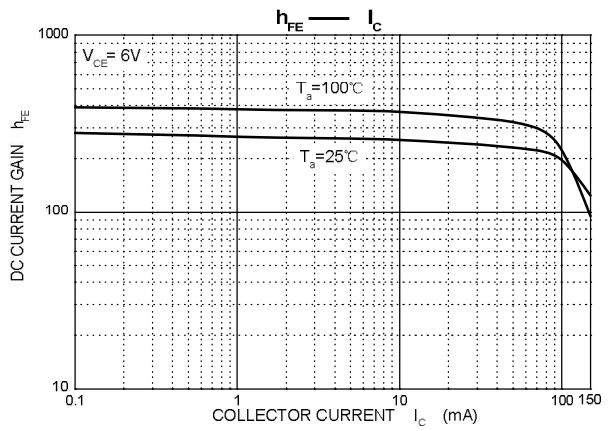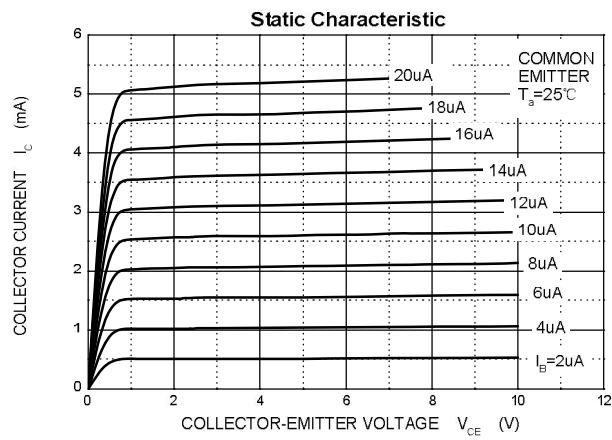


TO-92 Package Outline Dimensions

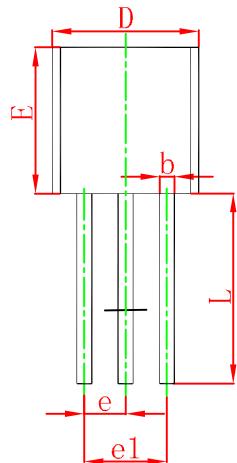

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015


TO-92 Suggested Pad Layout

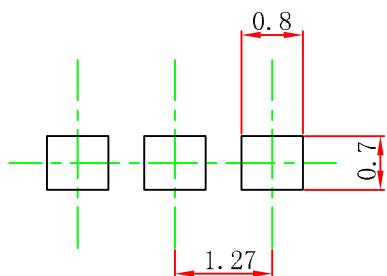


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

TO-92 PACKAGE TAPEING DIMENSION

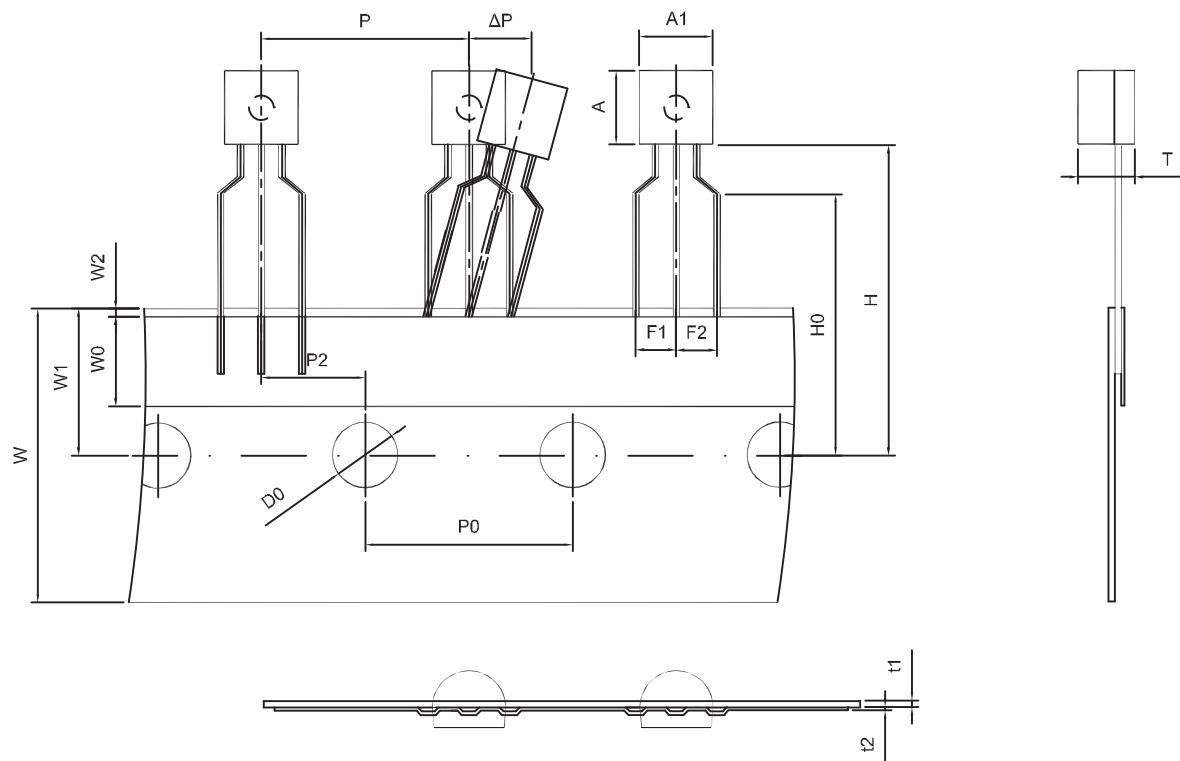

Dimensions are in millimeter									
A1	A	T	P	P0	P2	F1	F2	W	
4.5±0.2	4.5±0.2	3.5±0.2	12.7±0.3	12.7±0.2	6.35±0.3	2.5±0.3	2.5±0.3	18.0+1.0/-0.5	
W0	W1	W2	H	H0	D0	t1	t2	ΔP	
6.0±0.5	9.0±0.5	1.0 MAX.	19.0±1.0	16.0±0.5	4.0±0.2	0.4±0.05	0.2±0.05	0 ± 1.0	

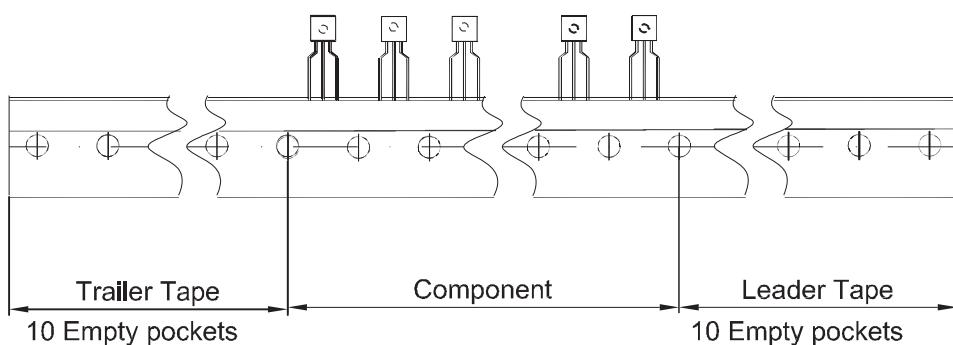

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250