



DONGGUAN NANJING ELECTRONICS LTD.,


PNP Silicon Epitaxial Planar Transistor

2N3905 / 2N3906

for switching and amplifier applications.

As complementary types the NPN transistors 2N3903 and 2N3904 are recommended.

On special request, these transistors can be manufactured in different pin configurations.



1. Emitter 2. Base 3. Collector
TO-92 Plastic Package
Weight approx. 0.19g

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	40	V
Collector Emitter Voltage	$-V_{CEO}$	40	V
Emitter Base Voltage	$-V_{EBO}$	6	V
Collector Current	$-I_C$	200	mA
Power Dissipation	P_{tot}	625	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_s	- 55 to + 150	$^\circ\text{C}$


2N3905 / 2N3906

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $-V_{CE} = 1\text{ V}$, $-I_C = 0.1\text{ mA}$	2N3905	h_{FE}	30	-
	2N3906	h_{FE}	60	-
at $-V_{CE} = 1\text{ V}$, $-I_C = 1\text{ mA}$	2N3905	h_{FE}	40	-
	2N3906	h_{FE}	80	-
at $-V_{CE} = 1\text{ V}$, $-I_C = 10\text{ mA}$	2N3905	h_{FE}	50	150
	2N3906	h_{FE}	100	300
at $-V_{CE} = 1\text{ V}$, $-I_C = 50\text{ mA}$	2N3905	h_{FE}	30	-
	2N3906	h_{FE}	60	-
at $-V_{CE} = 1\text{ V}$, $-I_C = 100\text{ mA}$	2N3905	h_{FE}	15	-
	2N3906	h_{FE}	30	-
Collector Cutoff Current at $-V_{CB} = 30\text{ V}$	$-I_{CBO}$	-	50	nA
Emitter Cutoff Current at $-V_{EB} = 6\text{ V}$	$-I_{EBO}$	-	50	nA
Collector Base Breakdown Voltage at $-I_C = 10\text{ }\mu\text{A}$	$-V_{(BR)CBO}$	40	-	V
Collector Emitter Breakdown Voltage at $-I_C = 1\text{ mA}$	$-V_{(BR)CEO}$	40	-	V
Emitter Base Breakdown Voltage at $-I_E = 10\text{ }\mu\text{A}$	$-V_{(BR)EBO}$	6	-	V
Collector Emitter Saturation Voltage at $-I_C = 10\text{ mA}$, $-I_B = 1\text{ mA}$ at $-I_C = 50\text{ mA}$, $-I_B = 5\text{ mA}$	$-V_{CEsat}$	-	0.25	V
	$-V_{CEsat}$	-	0.4	V
Base Emitter Saturation Voltage at $-I_C = 10\text{ mA}$, $-I_B = 1\text{ mA}$ at $-I_C = 50\text{ mA}$, $-I_B = 5\text{ mA}$	$-V_{BEsat}$	-	0.85	V
	$-V_{BEsat}$	-	0.95	V
Gain Bandwidth Product at $-V_{CE} = 20\text{ V}$, $-I_C = 10\text{ mA}$, $f = 100\text{ MHz}$	2N3905	f_T	200	-
	2N3906	f_T	250	-
Collector Base Capacitance at $-V_{CB} = 5\text{ V}$, $f = 100\text{ KHz}$	C_{cb}	-	4.5	pF
Emitter Base Capacitance at $-V_{EB} = 0.5\text{ V}$, $f = 100\text{ KHz}$	C_{eb}	-	10	pF
Thermal Resistance Junction to Ambient	R_{thA}	-	250 ¹⁾	K/W
¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case				

2N3905 / 2N3906

DC Current Gain

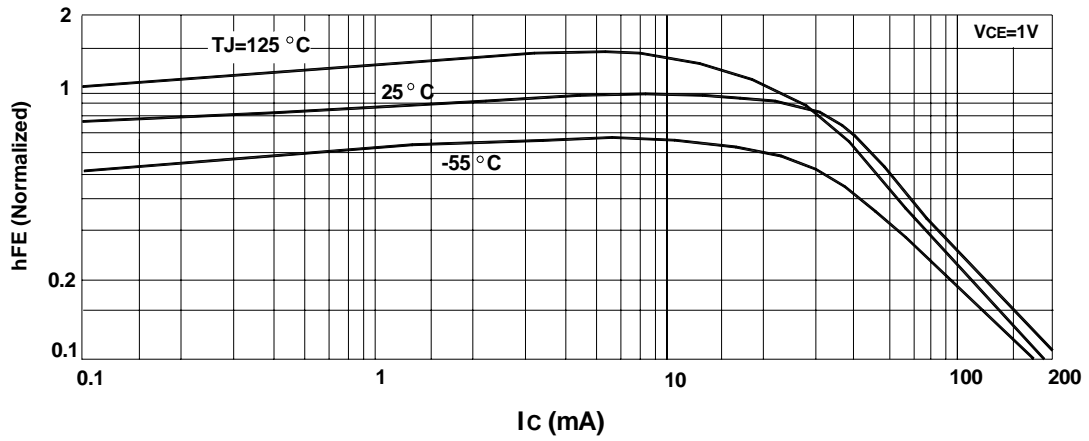

Collector Saturation Region

