




DONGGUAN NANJING ELECTRONICS LTD.,

TO-220-3L Plastic-Encapsulate Voltage Regulator

7906 Three-terminal negative voltage regulator

FEATURES

- Maximum output current
 $I_{OM}: 1.5\text{ A}$
- Output voltage
 $V_O: -6\text{ V}$
- Continuous total dissipation
 $P_D: 1.5\text{ W}$ ($T_a = 25\text{ }^\circ\text{C}$)

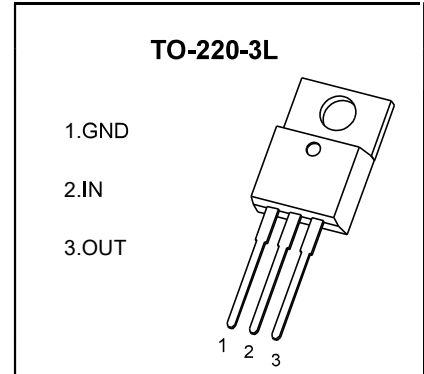

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


| Parameter | Symbol | Value | Unit |
|---|-----------------|----------|--------------------|
| Input Voltage | V_i | -35 | V |
| Thermal Resistance from Junction to Air | $R_{\theta JA}$ | 83.3 | $^\circ\text{C/W}$ |
| Operating Junction Temperature Range | T_{OPR} | -40~+125 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -65~+150 | $^\circ\text{C}$ |

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i = -11\text{ V}$, $I_o = 500\text{ mA}$, $C_i = 2.2\text{ }\mu\text{F}$, $C_o = 1\text{ }\mu\text{F}$, unless otherwise specified)


| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|--------------------------|-----------------------|---|---------------------------------|------|-------|----------------------------|
| Output Voltage | V_o | $25\text{ }^\circ\text{C}$ | -5.76 | -6 | -6.24 | V |
| | | $-8\text{ V} \leq V_i \leq -21\text{ V}$, $I_o = 5\text{ mA} - 1\text{ A}$ | $0 - 125\text{ }^\circ\text{C}$ | -5.7 | -6 | -6.3 |
| Load Regulation | ΔV_o | $I_o = 5\text{ mA} - 1.5\text{ A}$ | $25\text{ }^\circ\text{C}$ | 15 | 120 | mV |
| | | $I_o = 250\text{ mA} - 750\text{ mA}$ | $25\text{ }^\circ\text{C}$ | 5 | 60 | mV |
| Line Regulation | ΔV_o | $-8\text{ V} \leq V_i \leq -25\text{ V}$ | $25\text{ }^\circ\text{C}$ | 12.5 | 120 | mV |
| | | $-9\text{ V} \leq V_i \leq -13\text{ V}$ | $25\text{ }^\circ\text{C}$ | 4 | 60 | mV |
| Quiescent Current | I_q | $25\text{ }^\circ\text{C}$ | | 1.5 | 2 | mA |
| Quiescent Current Change | ΔI_q | $-8\text{ V} \leq V_i \leq -25\text{ V}$ | $0 - 125\text{ }^\circ\text{C}$ | | 1.3 | mA |
| | ΔI_q | $5\text{ mA} \leq I_o \leq 1\text{ A}$ | $0 - 125\text{ }^\circ\text{C}$ | | 0.5 | mA |
| Output Noise Voltage | V_N | $10\text{ Hz} \leq f \leq 100\text{ KHz}$ | $25\text{ }^\circ\text{C}$ | 150 | | $\mu\text{V}/V_o$ |
| Output Voltage Drift | $\Delta V_o/\Delta T$ | $I_o = 5\text{ mA}$ | $0 - 125\text{ }^\circ\text{C}$ | -0.4 | | $\text{mV}/^\circ\text{C}$ |
| Ripple Rejection | RR | $-9\text{ V} \leq V_i \leq -19\text{ V}$, $f = 120\text{ Hz}$ | $0 - 125\text{ }^\circ\text{C}$ | 54 | 60 | dB |
| Dropout Voltage | V_d | $I_o = 1\text{ A}$ | $25\text{ }^\circ\text{C}$ | 1.1 | | V |
| Peak Current | I_{pk} | $25\text{ }^\circ\text{C}$ | | 2.1 | | A |

* Pulse test.

TYPICAL APPLICATION

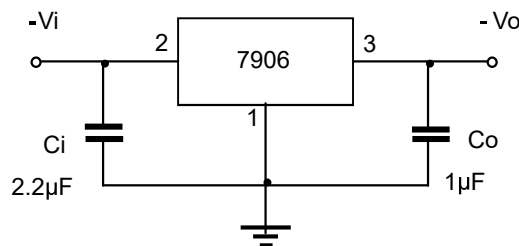

TO-220-3L Package Outline Dimensions

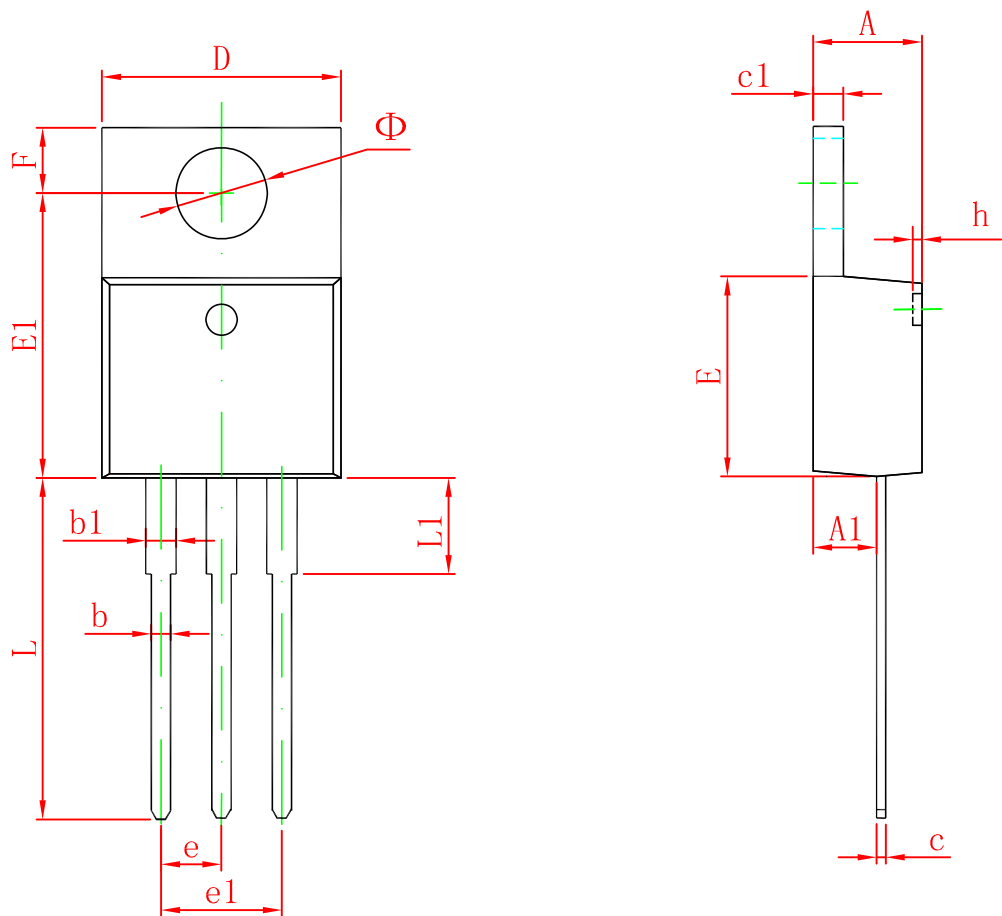

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|--------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 4.470 | 4.670 | 0.176 | 0.184 |
| A1 | 2.520 | 2.820 | 0.099 | 0.111 |
| b | 0.710 | 0.910 | 0.028 | 0.036 |
| b1 | 1.170 | 1.370 | 0.046 | 0.054 |
| c | 0.310 | 0.530 | 0.012 | 0.021 |
| c1 | 1.170 | 1.370 | 0.046 | 0.054 |
| D | 10.010 | 10.310 | 0.394 | 0.406 |
| E | 8.500 | 8.900 | 0.335 | 0.350 |
| E1 | 12.060 | 12.460 | 0.475 | 0.491 |
| e | 2.540 TYP | | 0.100 TYP | |
| e1 | 4.980 | 5.180 | 0.196 | 0.204 |
| F | 2.590 | 2.890 | 0.102 | 0.114 |
| h | 0.000 | 0.300 | 0.000 | 0.012 |
| L | 13.400 | 13.800 | 0.528 | 0.543 |
| L1 | 3.560 | 3.960 | 0.140 | 0.156 |
| Φ | 3.735 | 3.935 | 0.147 | 0.155 |