



TO-220-3L Plastic-Encapsulate Transistors


2SD882 TRANSISTOR (NPN)

FEATURES


- ▽ Power Dissipation

TO-220-3L

1. EMITTER
2. COLLECTOR
3. BASE




MARKING

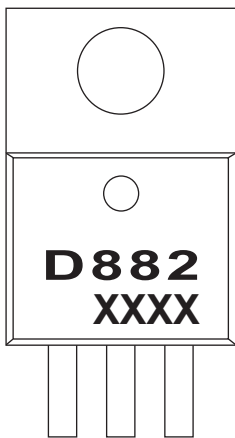

Ö Ì G=Device code
XXXX=Code

Equivalent Circuit



MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

| Symbol | Parameter | Value | Unit |
|-----------------------------------|--|---------|------|
| V _{CBO} | Collector-Base Voltage | 40 | V |
| V _{CEO} | Collector-Emitter Voltage | 30 | V |
| V _{EBO} | Emitter-Base Voltage | 6 | V |
| I _C | Collector Current -Continuous | 3 | A |
| P _C | Collector Power Dissipation | 2 | W |
| T _J , T _{stg} | Operation Junction and Storage Temperature Range | -55-150 | °C |








ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|--------------------------------------|-----------------------------|--|-----|-----|-----|---------------|
| Collector-base breakdown voltage | $V(\text{BR})_{\text{CBO}}$ | $I_C = 100\mu\text{A}, I_E=0$ | 40 | | | V |
| Collector-emitter breakdown voltage | $V(\text{BR})_{\text{CEO}}$ | $I_C = 10\text{mA}, I_B=0$ | 30 | | | V |
| Emitter-base breakdown voltage | $V(\text{BR})_{\text{EBO}}$ | $I_E = 100\mu\text{A}, I_C=0$ | 6 | | | V |
| Collector cut-off current | I_{CBO} | $V_{\text{CB}} = 40\text{V}, I_E=0$ | | | 1 | μA |
| Collector cut-off current | I_{CEO} | $V_{\text{CE}} = 30\text{V}, I_B=0$ | | | 10 | μA |
| Emitter cut-off current | I_{EBO} | $V_{\text{EB}} = 6\text{V}, I_C=0$ | | | 1 | μA |
| DC current gain | h_{FE} | $V_{\text{CE}} = 2\text{V}, I_C = 1\text{A}$ | 60 | | 400 | |
| Collector-emitter saturation voltage | $V_{\text{CE}(\text{sat})}$ | $I_C = 2\text{A}, I_B = 0.2\text{A}$ | | | 0.5 | V |
| Base-emitter saturation voltage | $V_{\text{BE}(\text{sat})}$ | $I_C = 2\text{A}, I_B = 0.2\text{A}$ | | | 1.5 | V |
| Transition frequency | f_T | $V_{\text{CE}} = 5\text{V}, I_C = 0.1\text{A}$ $f = 10\text{MHz}$ | | 90 | | MHz |


CLASSIFICATION OF h_{FE}

| Rank | R | O | Y | GR |
|-------|--------|---------|---------|---------|
| Range | 60-120 | 100-200 | 160-320 | 200-400 |

Typical Characteristics

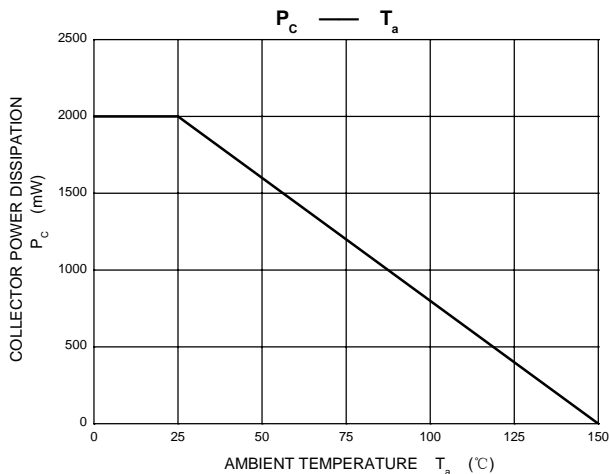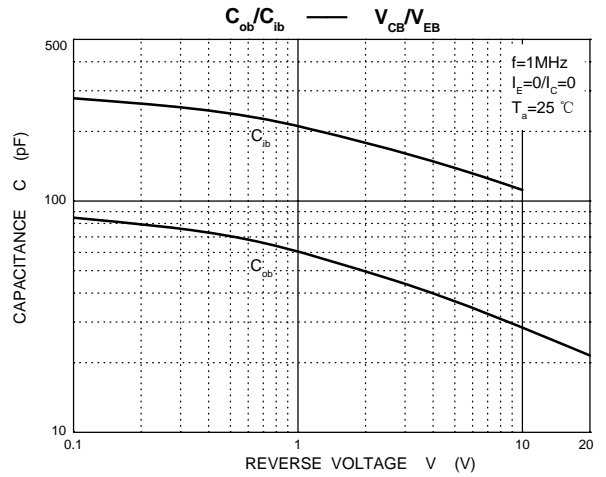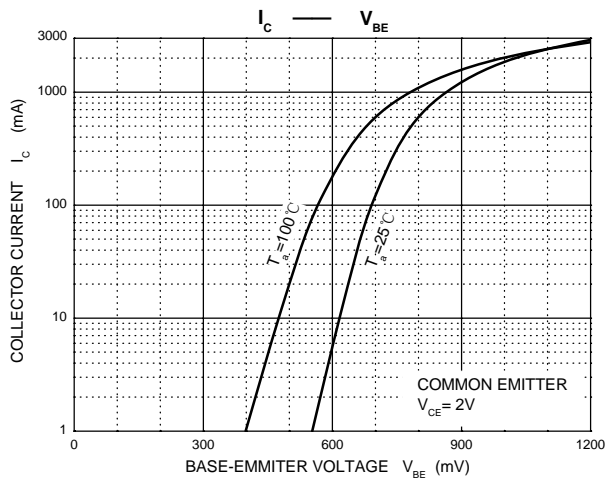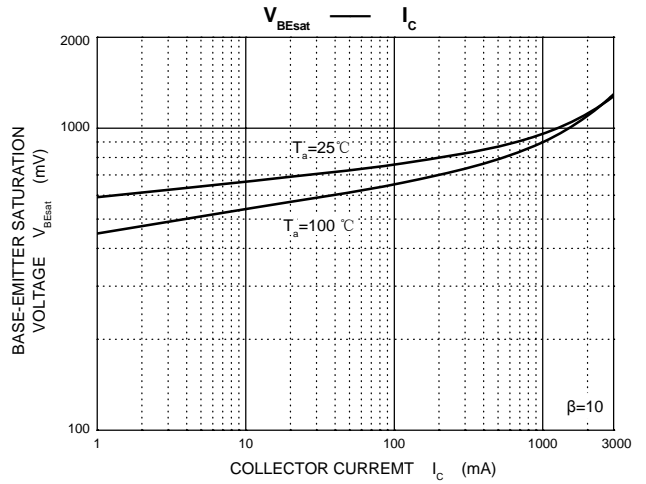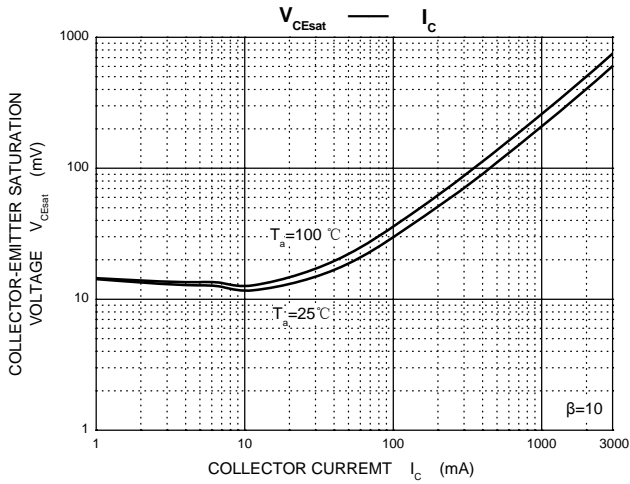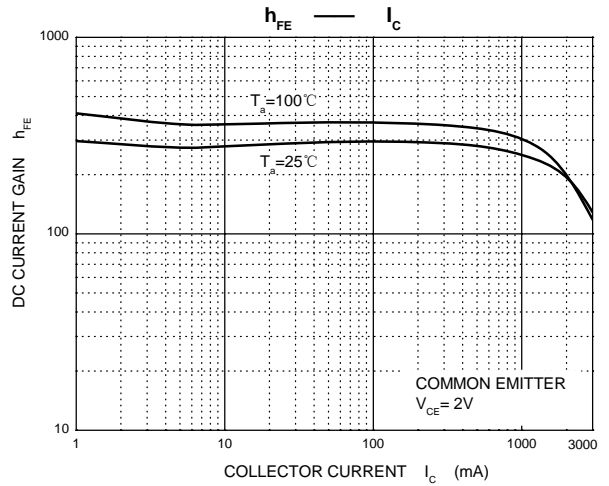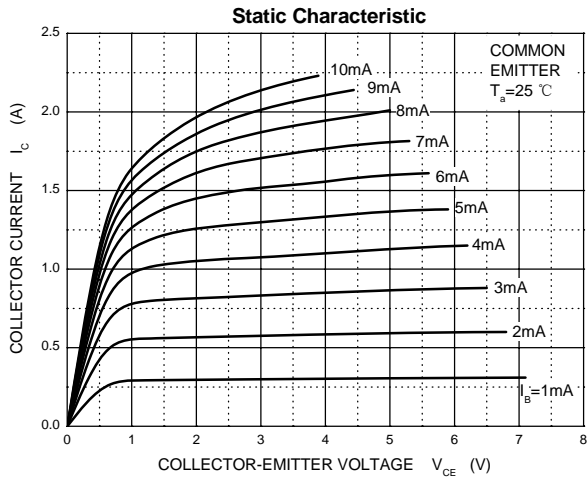

TO-220-3L Package Outline Dimensions

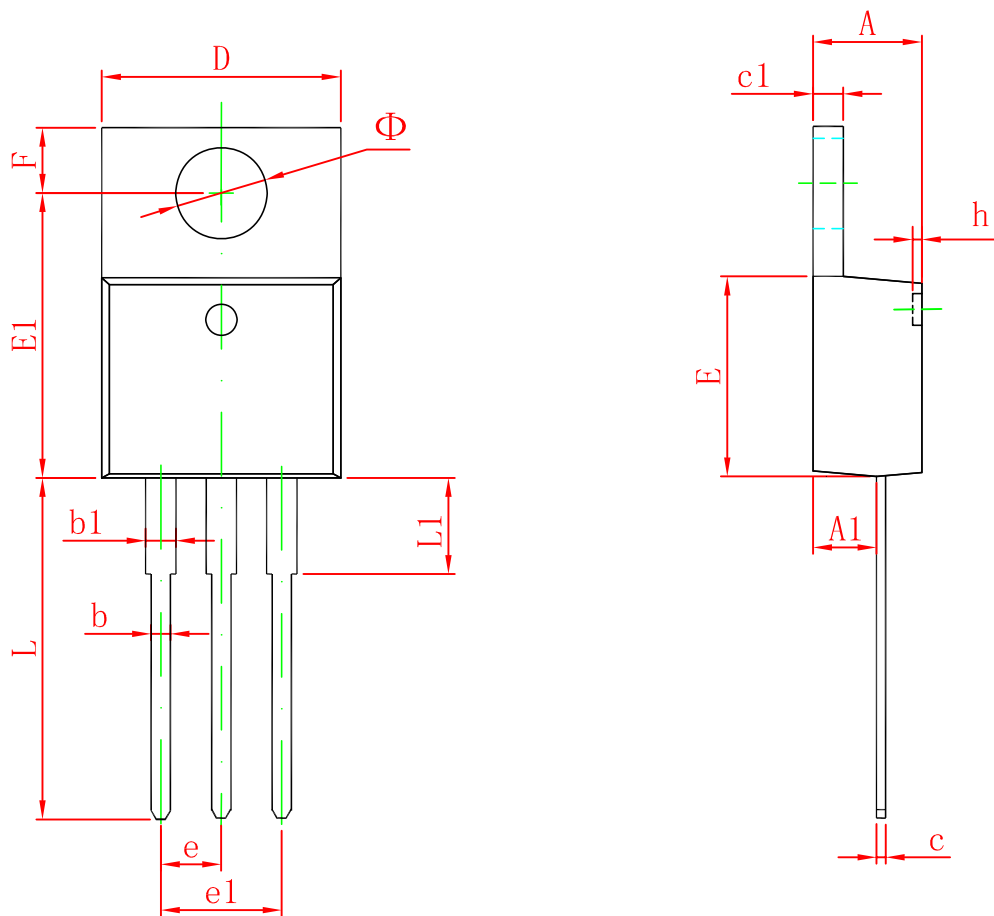

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|--------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 4.470 | 4.670 | 0.176 | 0.184 |
| A1 | 2.520 | 2.820 | 0.099 | 0.111 |
| b | 0.710 | 0.910 | 0.028 | 0.036 |
| b1 | 1.170 | 1.370 | 0.046 | 0.054 |
| c | 0.310 | 0.530 | 0.012 | 0.021 |
| c1 | 1.170 | 1.370 | 0.046 | 0.054 |
| D | 10.010 | 10.310 | 0.394 | 0.406 |
| E | 8.500 | 8.900 | 0.335 | 0.350 |
| E1 | 12.060 | 12.460 | 0.475 | 0.491 |
| e | 2.540 TYP | | 0.100 TYP | |
| e1 | 4.980 | 5.180 | 0.196 | 0.204 |
| F | 2.590 | 2.890 | 0.102 | 0.114 |
| h | 0.000 | 0.300 | 0.000 | 0.012 |
| L | 13.400 | 13.800 | 0.528 | 0.543 |
| L1 | 3.560 | 3.960 | 0.140 | 0.156 |
| Φ | 3.735 | 3.935 | 0.147 | 0.155 |