




DONGGUAN NANJING ELECTRONICS LTD.,

TO-92 Plastic-Encapsulate Transistors


2N5550 TRANSISTOR (NPN)

FEATURES

- Switching and Amplification in High Voltage
- Applications such as Telephony
- Low Current(Max. 600mA)
- High Voltage(Max.160V)

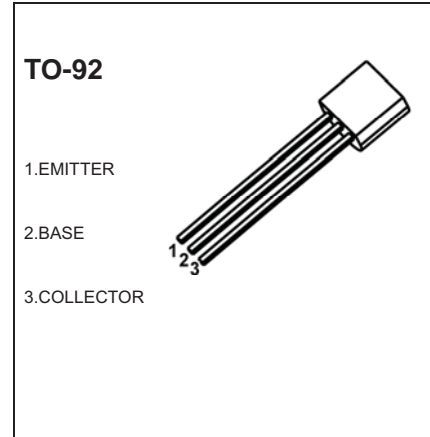


MARKING



2N5550=Device code
XXX=Code

Equivalent Circuit



ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
2N5550	TO-92	Bulk	1000pcs/Bag
2N5550-TA	TO-92	Tape	2000pcs/Box

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$ unless otherwise noted)









Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	160	V
V_{CEO}	Collector-Emitter Voltage	140	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	0.6	A
P_C	Collector Power Dissipation	0.625	W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55-150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS

$T_a=25\text{ }^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\ \mu\text{ A}, I_E=0$	160			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1\text{ mA}, I_B=0$	140			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\ \mu\text{ A}, I_C=0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB}=100\text{ V}, I_E=0$			0.1	$\mu\text{ A}$
Emitter cut-off current	I_{EBO}	$V_{EB}=4\text{ V}, I_C=0$			0.05	$\mu\text{ A}$
DC current gain	$h_{FE(1)}$	$V_{CE}=5\text{ V}, I_C=1\text{ mA}$	60			
	$h_{FE(2)}$	$V_{CE}=5\text{ V}, I_C=10\text{ mA}$	60		250	
	$h_{FE(3)}$	$V_{CE}=5\text{ V}, I_C=50\text{ mA}$	20			
Collector-emitter saturation voltage	V_{CEsat}	$I_C=10\text{ mA}, I_B=1\text{ mA}$ $I_C=50\text{ mA}, I_B=5\text{ mA}$			0.15 0.25	V
Base-emitter saturation voltage	V_{BEsat}	$I_C=10\text{ mA}, I_B=1\text{ mA}$ $I_C=50\text{ mA}, I_B=5\text{ mA}$			1 1.2	V
Transition frequency	f_T	$V_{CE}=10\text{ V}, I_C=10\text{ mA}, f=100\text{ MHz}$	100		300	MHz
Collector output capacitance	C_{ob}	$V_{CB}=10\text{ V}, I_E=0, f=1\text{ MHz}$			6	pF
Noise figure	NF	$V_{CE}=5\text{ V}, I_C=0.25\text{ mA},$ $f=1\text{ KHZ}, R_s=1\text{ k}\Omega$			10	dB

Typical Characteristics

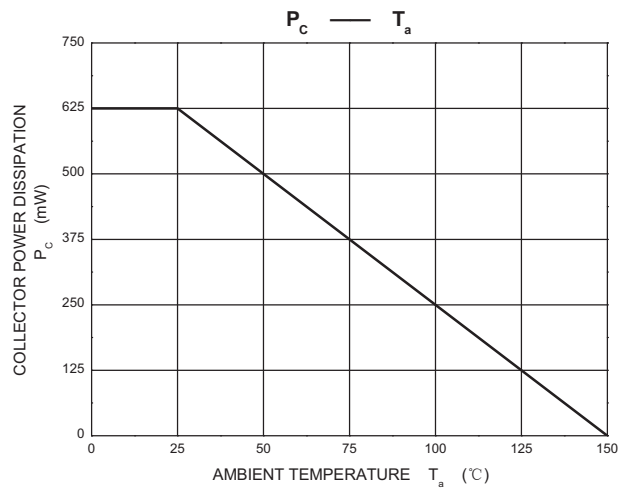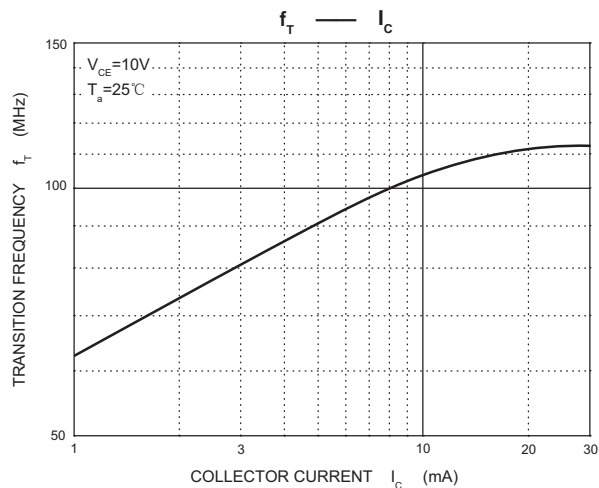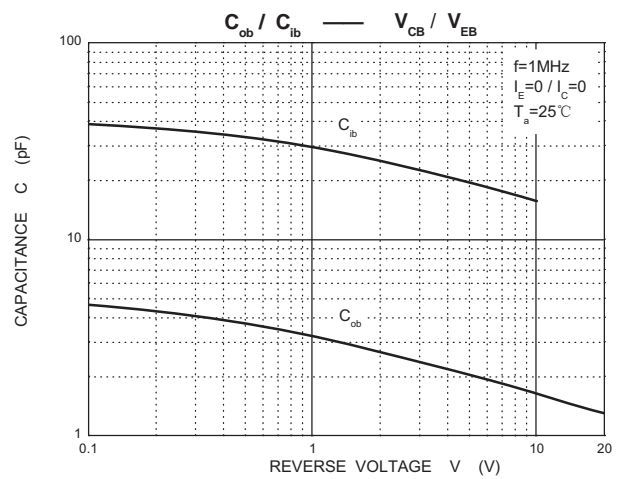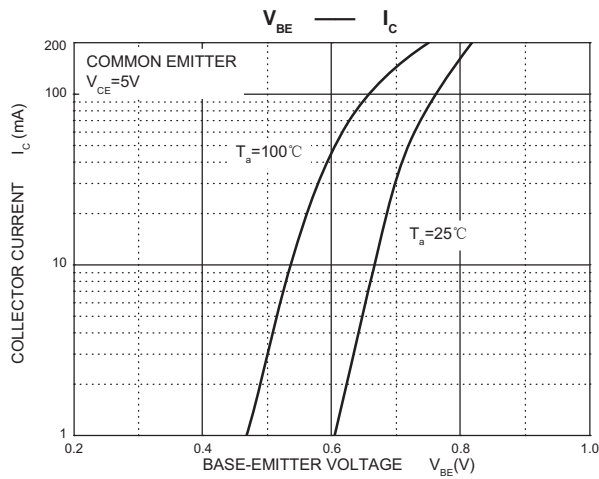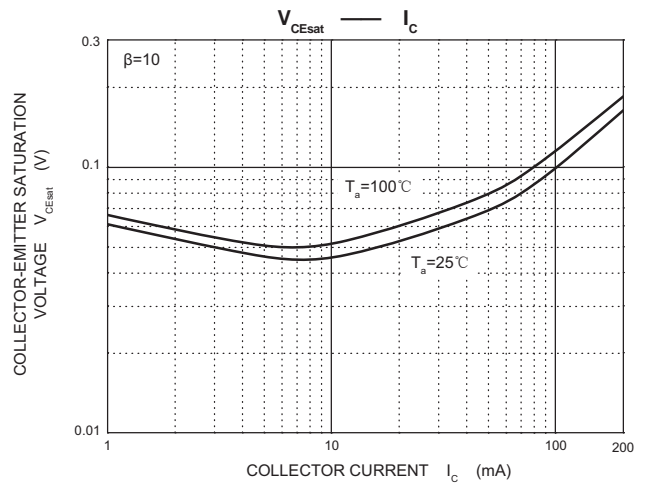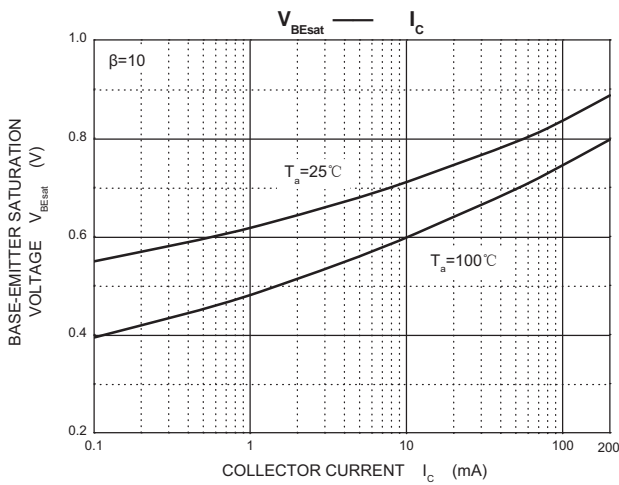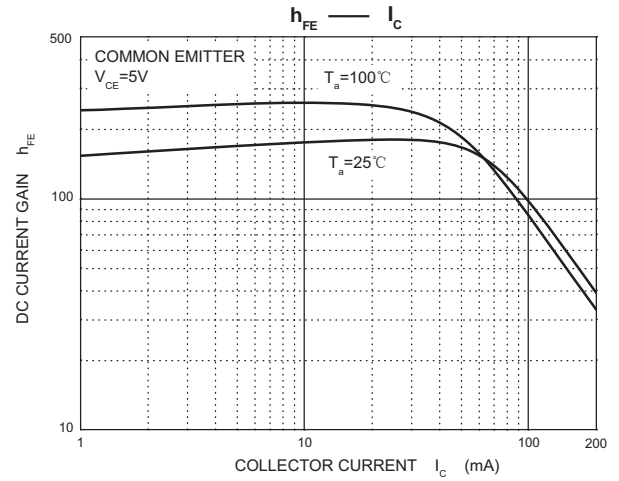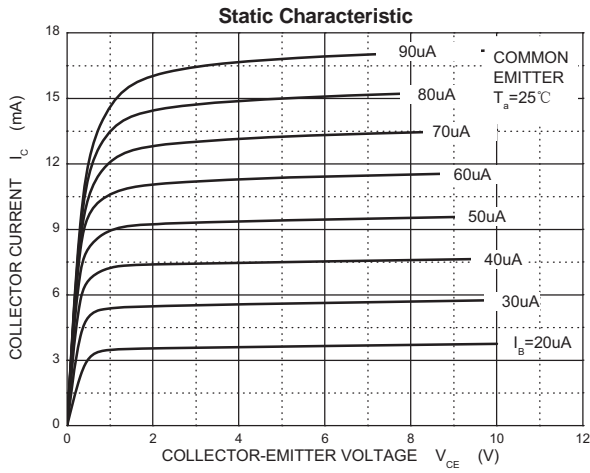


TO-92 Package Outline Dimensions



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015

TO-92 Suggested Pad Layout

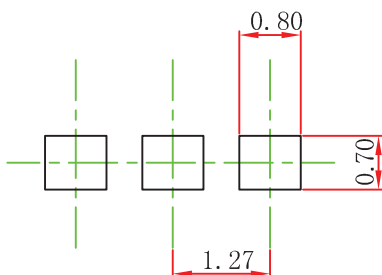


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

TO-92 Tape and Reel



Dimiensions are in millimeter								
A1	A	T	P	P0	P2	F1	F2	W
4.5	4.5	3.5	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0 MAX.	19.0	16.0	4.0	0.4	0.2	0

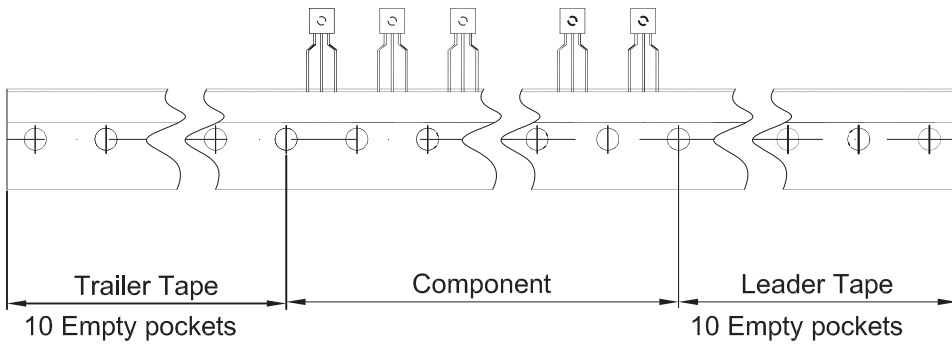

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250