



## TO-277 Plastic-Encapsulate Diodes

### **SB20150** Schottky Rectifier Diode

#### Features


- $I_{F(AV)}$  20A
- $V_{RRM}$  150 V
- High surge current capability
- Low peak forward voltage

#### Applications

- Rectifier

#### Marking

- SB20150

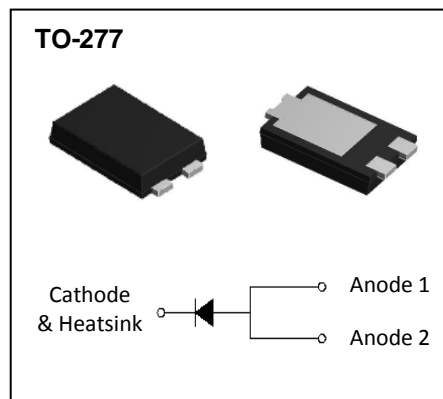

#### Limiting Values(Absolute Maximum Rating)

Item	Symbol	Unit	Test Conditions	SB20150
Repetitive Peak Reverse Voltage	$V_{RRM}$	V		150
Maximum RMS Voltage	$V_{RMS}$	V		105
Average Forward Current	$I_{F(AV)}$	A	60Hz Half-sine wave, Resistance load, TL(Fig.1)	20
Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	60Hz Half-sine wave, 1 cycle, $T_a=25^\circ\text{C}$	250
Junction Temperature	$T_J$	$^\circ\text{C}$		-55 ~ +150
Storage Temperature	$T_{STG}$	$^\circ\text{C}$		-55 ~ +150

#### Electrical Characteristics ( $T=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	SB20150	
Peak Forward Voltage	$V_F$	V	$I_F=200\text{A}$	$T_a=25^\circ\text{C}$	0.82(TYP) 0.90(MAX)
				$T_a=125^\circ\text{C}$	0.66(TYP) 0.74(MAX)
Peak Reverse Current	$I_{RRM1}$	mA	$V_{RM}=V_{RRM}$	$T_a=25^\circ\text{C}$	0.02(TYP) 0.08(MAX)
	$I_{RRM2}$			$T_a=125^\circ\text{C}$	10(TYP) 20(MAX)
Thermal Resistance(Typical)	$R_{\theta J-A}$	$^\circ\text{C/W}$	Between junction and ambient	80	
	$R_{\theta J-L}$		Between junction and terminal	5	
Typical junction capacitance	$C_J$	nF	$V_R=4.0\text{ V}$ , $f=1\text{ MHz}$	0.98	

#### Notes:

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas

# Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

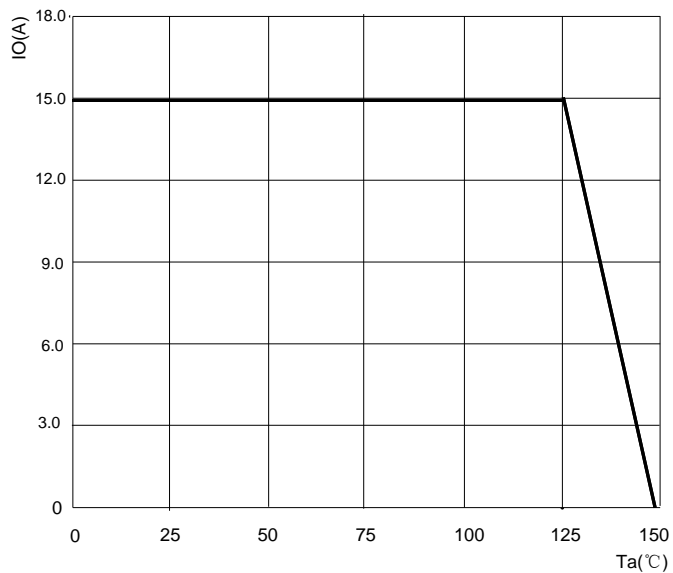


FIG.2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

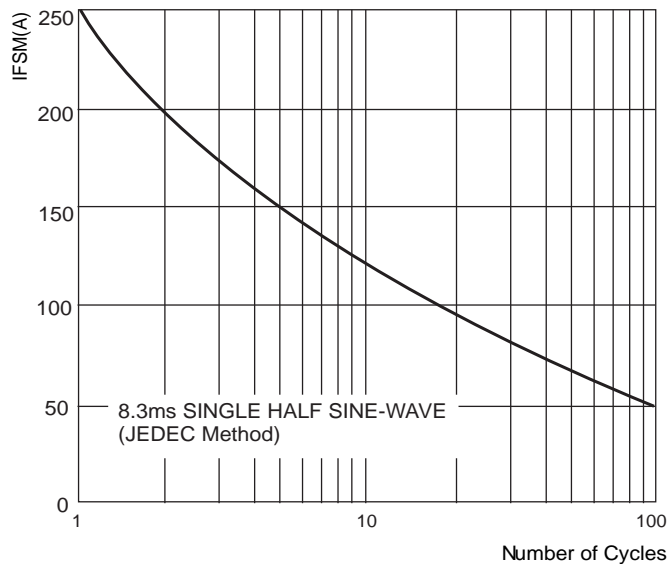


FIG.3: INSTANTANEOUS FORWARD CHARACTERISTICS



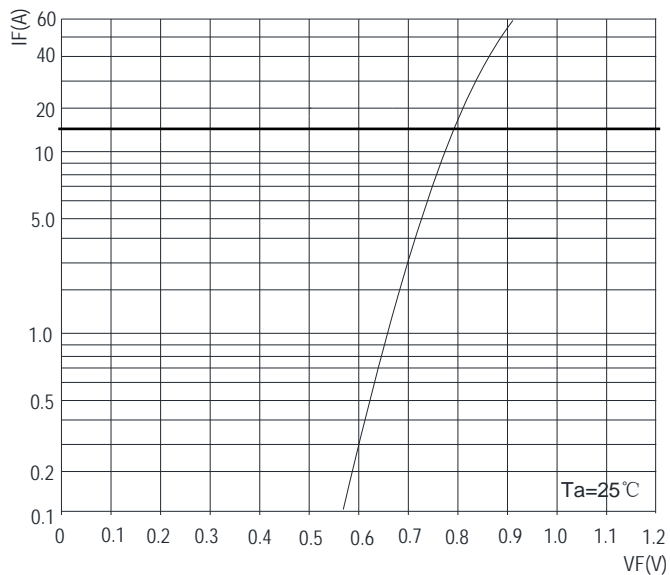


FIG.4: TYPICAL REVERSE CHARACTERISTICS

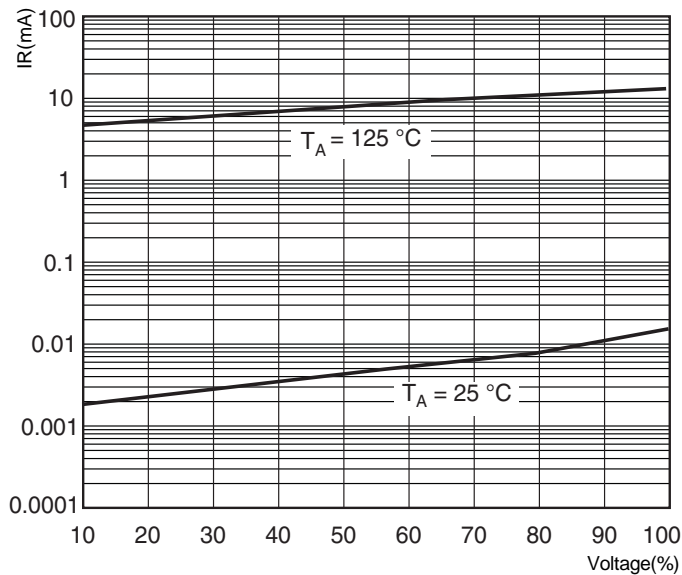


## TO- 277 Package Outline Dimensions

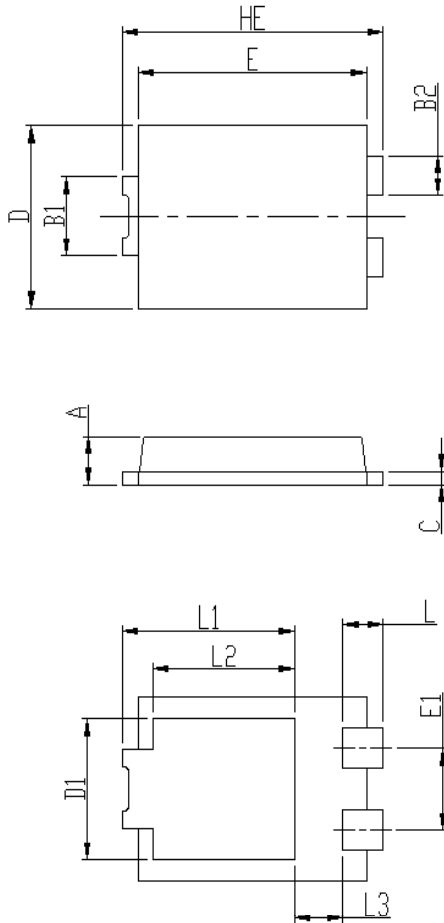

DIM	Unit: mm		Unit: inch	
	MIN	MAX	MIN	MAX
HE	6.4	6.6	0.252	0.260
E	5.6	5.8	0.220	0.228
D	4.1	4.3	0.161	0.169
B1	1.7	1.9	0.067	0.075
B2	0.8	1	0.031	0.039
A	1.05	1.2	0.041	0.047
C	0.3	0.4	0.012	0.016
L	0.85	1.1	0.033	0.043
L1	4.2	4.4	0.165	0.173
L2	3.52 Typ.		0.139 Typ.	
L3	1.1	1.4	0.043	0.055
D1	3	3.3	0.118	0.130
E1	1.86 Typ.		0.073 Typ.	

## TO- 277 Suggested Pad Layout

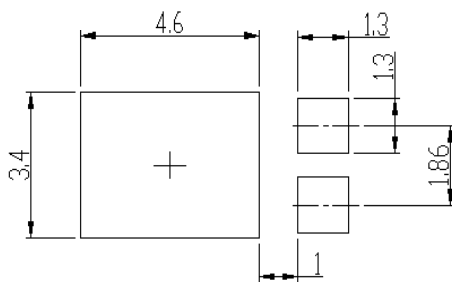

### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05$ mm.
3. The pad layout is for reference purposes only.