



DONGGUAN NANJING ELECTRONICS LTD.,

TO- 277 Plastic-Encapsulate Diodes

MUR1040 SUPER FAST RECOVER RECTIFIER

MAIN CHARACTERISTICS


I_o	10A
V_{RRM}	400V
T_j	150 °C
$V_F(\text{typ})$	1.0V (@ $T_j=125^\circ\text{C}$)

FEATURES

- Ultrafast 35ns Recovery Times
- High Voltage Capability to 400V
- Low Reverse Leakage Current

Marking

- MUR1040

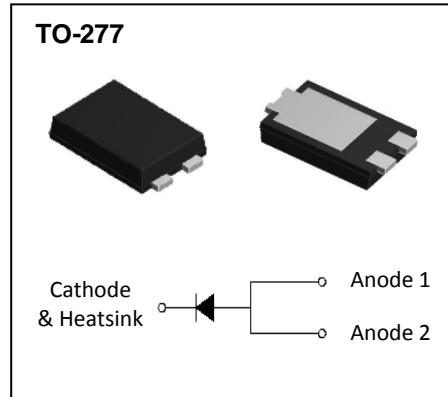






MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	MUR		Unit
		1040		
V_{RRM}	Peak repetitive reverse voltage			V
V_{RWM}	Working peak reverse voltage	400		
V_R	DC blocking voltage			
$V_{R(\text{RMS})}$	RMS reverse voltage	280		V
I_o	Average rectified output current@ Total device	10		A
I_{FSM}	Non-Repetitive peak forward surge current 8.3ms half sine wave	150		A
$R_{\theta JC}$	Typical thermal resistance	4.5		$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Thermal resistance from junction to ambient	62.5		
T_j	Operating Junction Temperature Range	-55 ~ +150		$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55 ~ +150		$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	$I_R=100\mu\text{A}$		400			V
Reverse current	I_R	$V_R=400\text{V}$	$T_j = 25^\circ\text{C}$		0.5	2	μA
			$T_j = 125^\circ\text{C}$		2.0		μA
Forward voltage	V_F	$I_F=10.0\text{A}$	$T_j = 25^\circ\text{C}$		1.04	1.25	V
			$T_j = 125^\circ\text{C}$			1.00	V
Typical total capacitance	C_{tot}	$V_R=4.0\text{V}, f=1\text{MHz}$			14		pF
Reverse recovery time	t_{rr}	$I_F= 0.5\text{A}, I_R=1\text{A}, I_{rr}=0.25\text{A}$				35	ns

Typical Characteristics

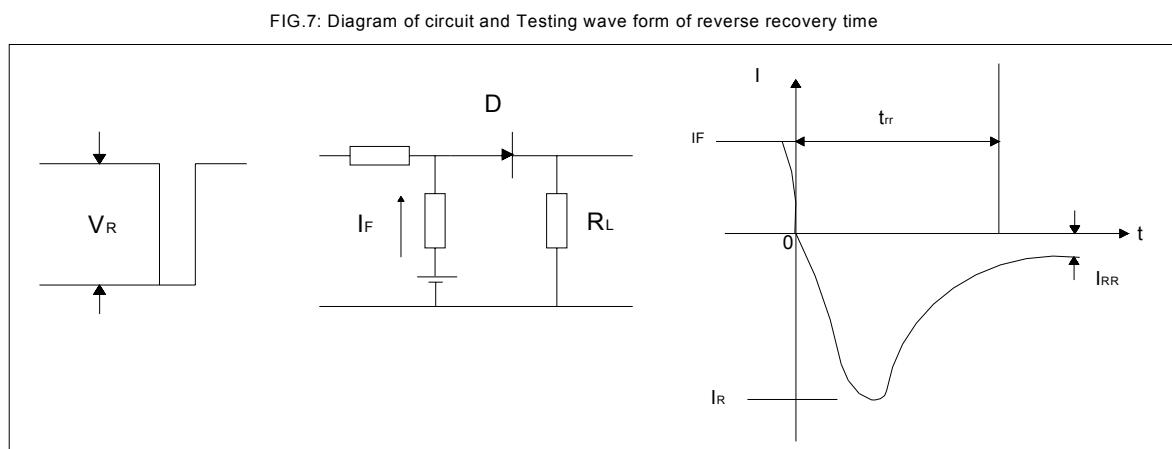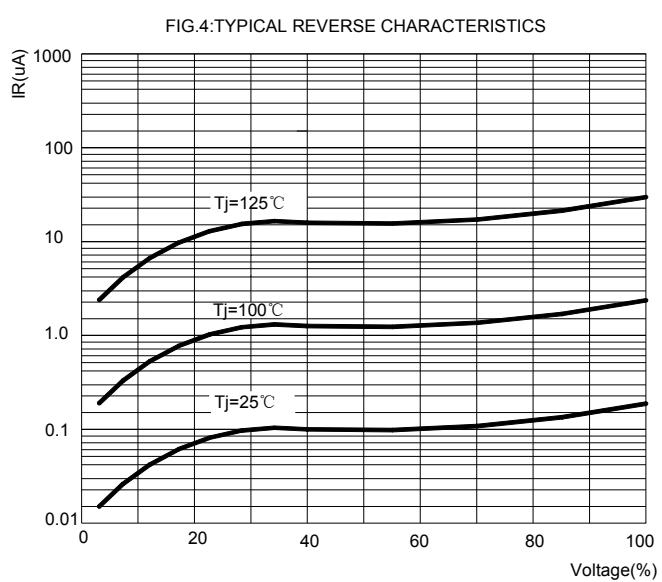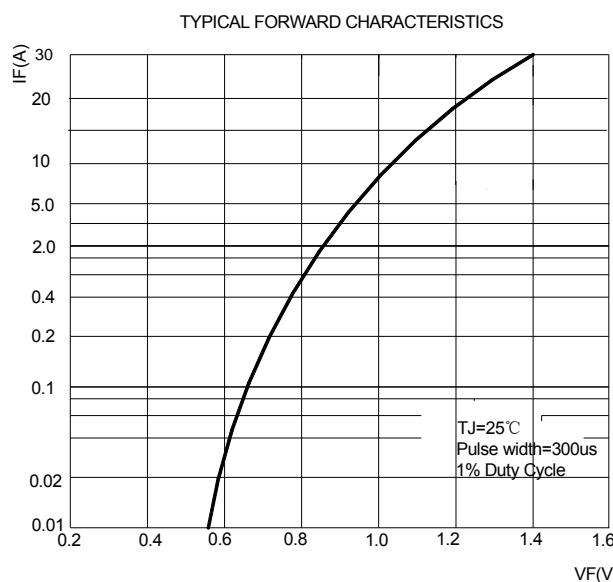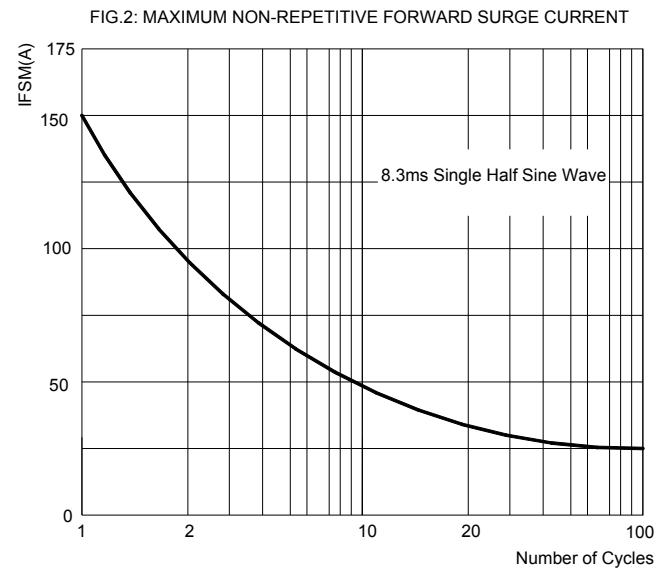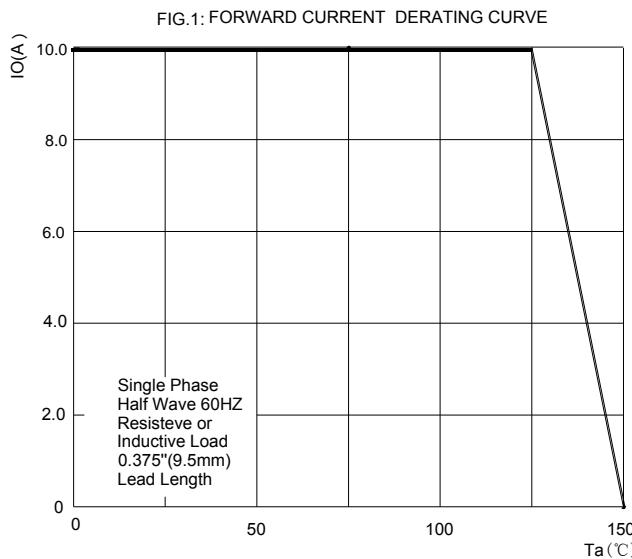


TO- 277 Package Outline Dimensions

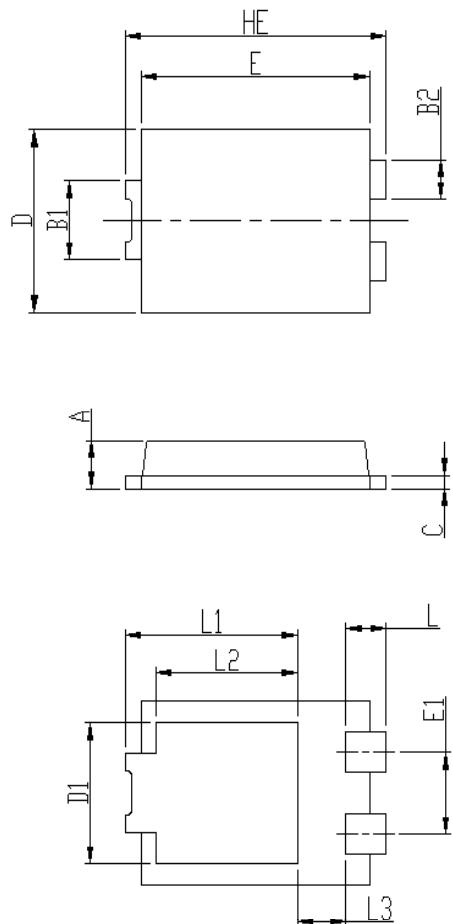

DIM	Unit: mm		Unit: inch	
	MIN	MAX	MIN	MAX
HE	6.4	6.6	0.252	0.260
E	5.6	5.8	0.220	0.228
D	4.1	4.3	0.161	0.169
B1	1.7	1.9	0.067	0.075
B2	0.8	1	0.031	0.039
A	1.05	1.2	0.041	0.047
C	0.3	0.4	0.012	0.016
L	0.85	1.1	0.033	0.043
L1	4.2	4.4	0.165	0.173
L2	3.52 Typ.		0.139 Typ.	
L3	1.1	1.4	0.043	0.055
D1	3	3.3	0.118	0.130
E1	1.86 Typ.		0.073 Typ.	

TO- 277 Suggested Pad Layout

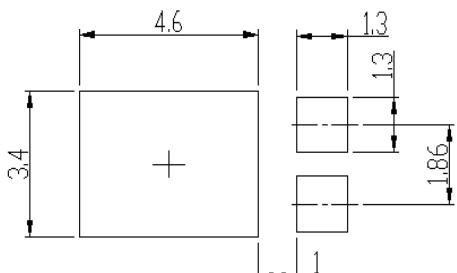

Note:

1. Controlling dimension in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.