



DONGGUAN NANJING ELECTRONICS LTD.,
DO-15 Plastic-Encapsulate Diodes


RL201G THRU RL207G 2.0 AMP GLASS PASSIVATED RECTIFIERS

FEATURES

- $I_{F(AV)}$ 2A
- V_{RRM} 50V-1000V
- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge current capability
- * Glass passivated junction

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.40 grams

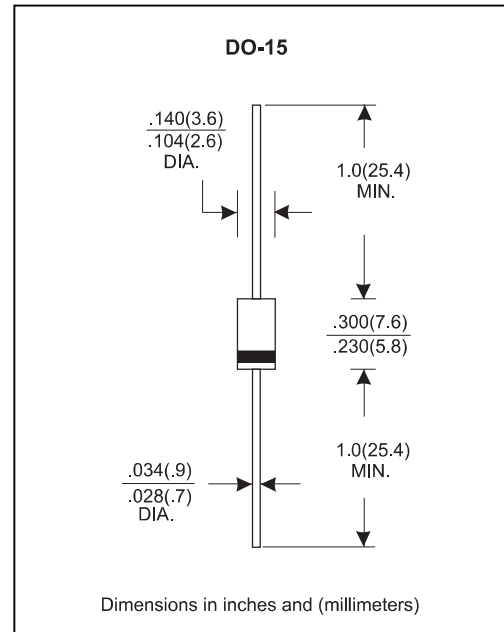

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
 Single phase half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

TYPE NUMBER	RL201G	RL202G	RL203G	RL204G	RL205G	RL206G	RL207G	UNITS	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current									
.375"(9.5mm) Lead Length at Ta=75°C								2.0	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)								70	A
Maximum Instantaneous Forward Voltage at 2.0A								1.1	V
Maximum DC Reverse Current Ta=25°C								5.0	µA
at Rated DC Blocking Voltage Ta=100°C								50	µA
Typical Junction Capacitance (Note 1)								20	pF
Typical Thermal Resistance RθJA (Note 2)								40	°C/W
Operating and Storage Temperature Range Tj, Tstg								-65 — +175	°C

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance from Junction to Ambient .375" (9.5mm) lead length.

RATING AND CHARACTERISTIC CURVES (RL201G THRU RL207G)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

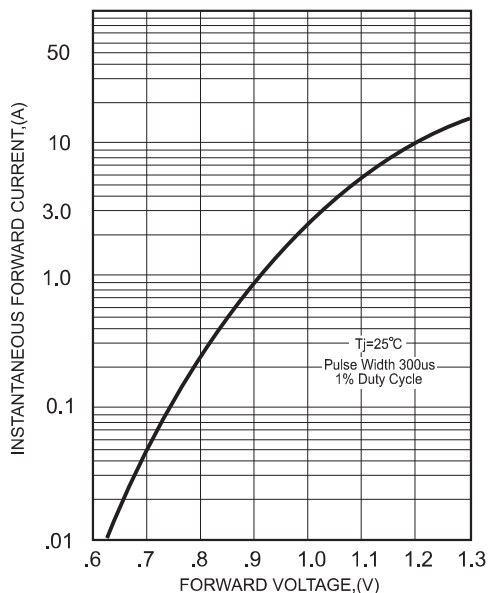


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

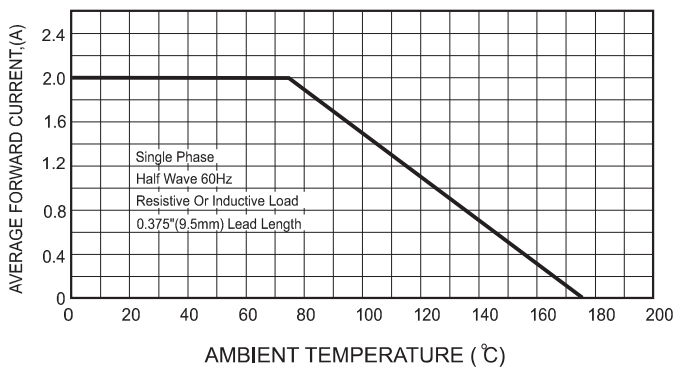


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

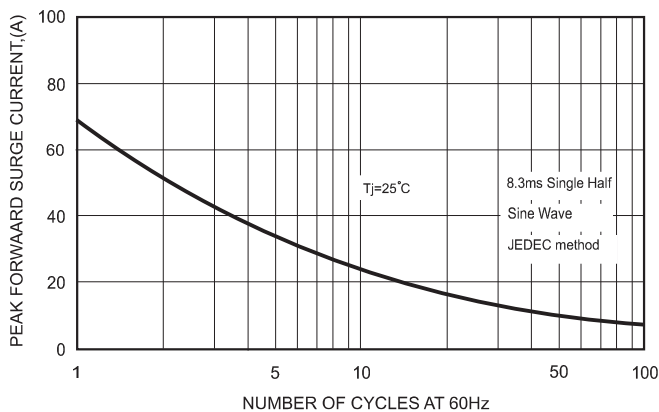


FIG.3 - TYPICAL REVERSE CHARACTERISTICS



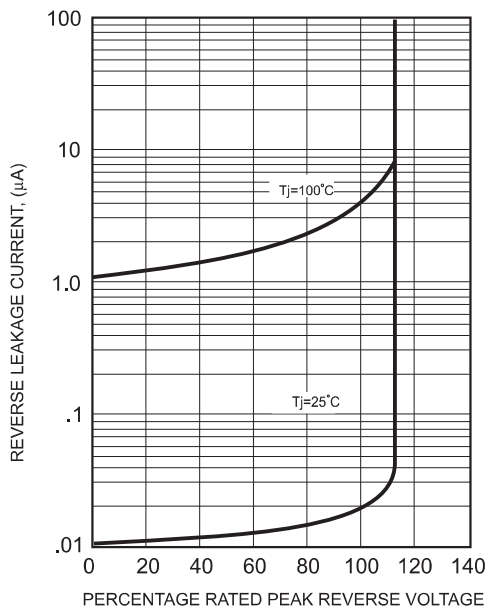



FIG.5-TYPICAL JUNCTION CAPACITANCE

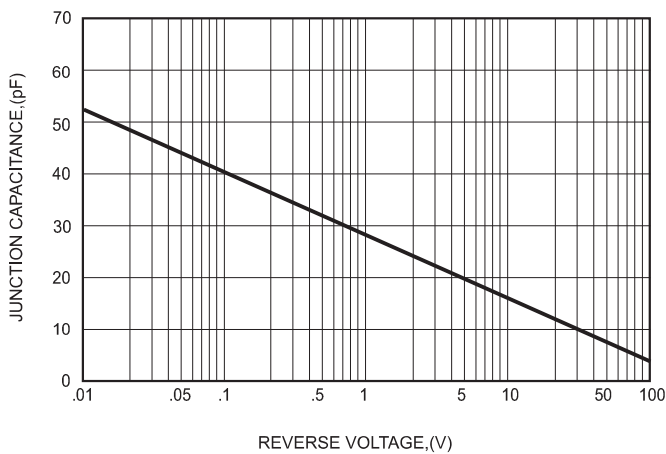

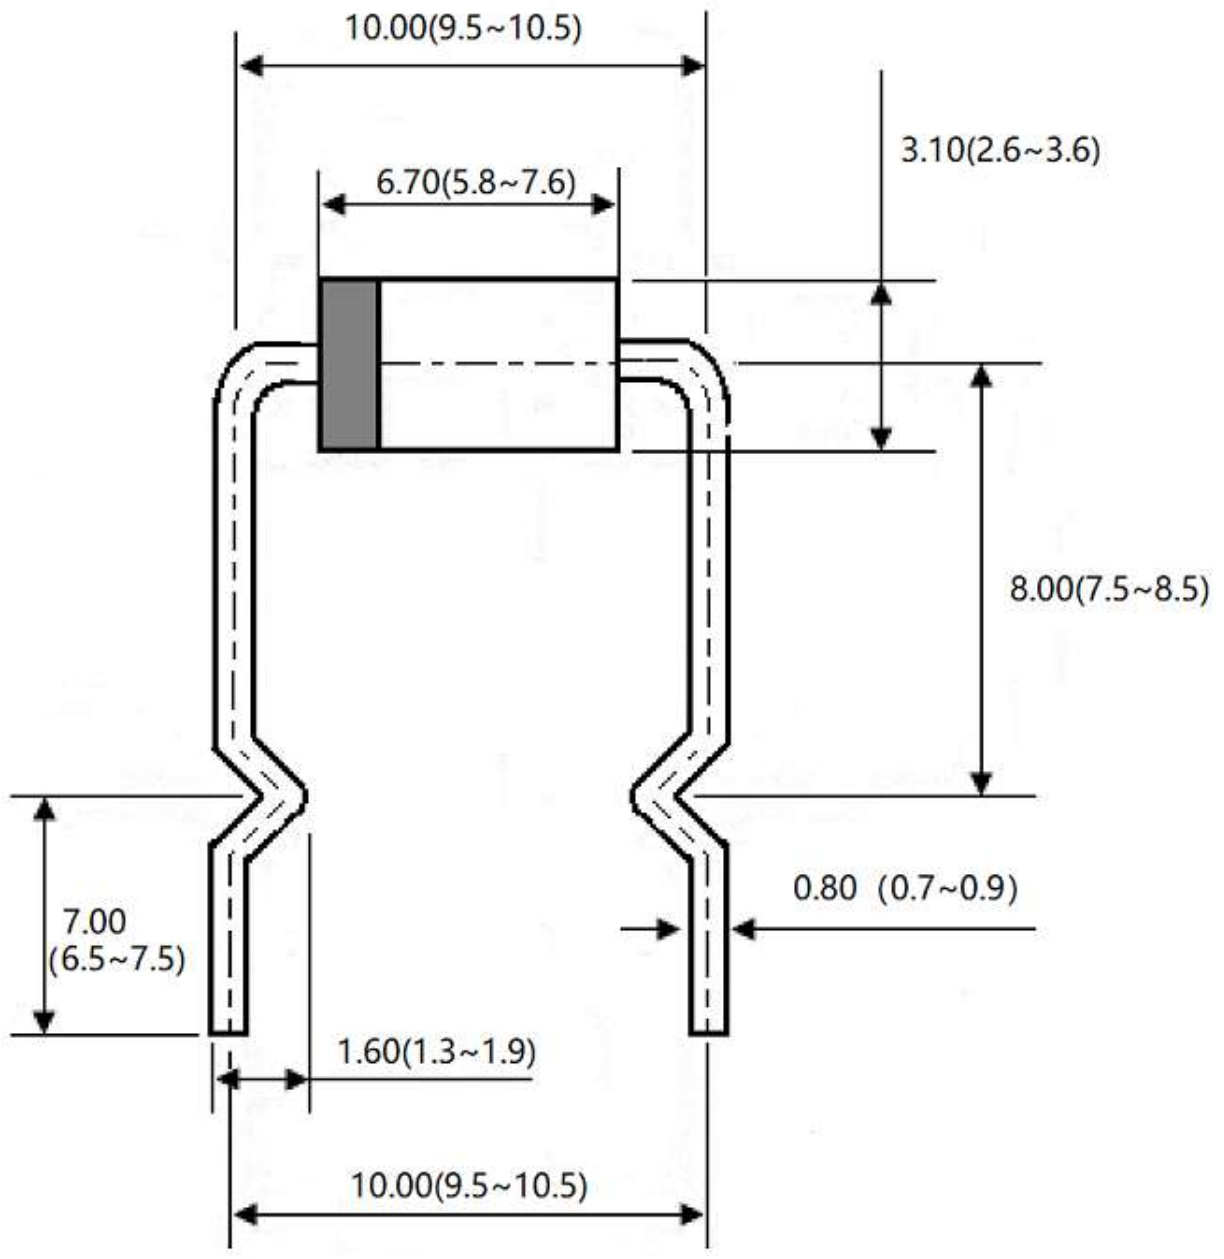

UNLESS OTHERWISE SPECIFIED LIMITS ARE: ANGULAR ±1.0'
 .0 ±.50
 .00 ±.10
 .000 ±.05

TITLE: RL207G 成型规格图
 MAT'L. QTY: FINISH: 2023/07/27
 UNIT: mm SCALE: SH'T: 1 OF 1



DRAWN CHECKED APPROVED

DAW.NO.: DO-15-M2 A4 REV: A

张洁

Dongguan Nanjing Electronic Ltd.