



## GBJ Plastic-Encapsulate Bridge Rectifier

### GBJ25005L THRU GBJ2510L Low VF General Purpose Bridge Rectifier

#### Features


- $I_o$  25A
- $V_{RRM}$  50V-1000V
- High surge current capability
- Low VF Value
- Planar technology chip

#### Applications

- General purpose 1 phase Bridge rectifier applications

#### Marking

- GBJ25XX  
XX : From 005L To 10L

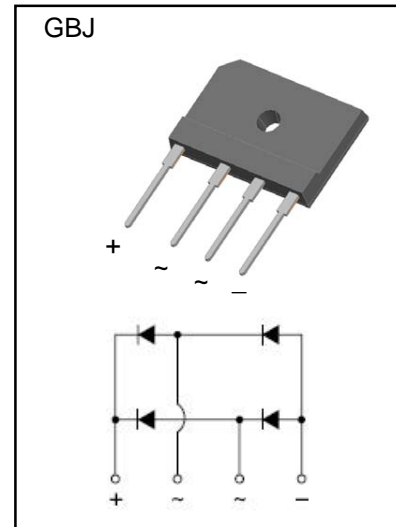

#### Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	GBJ25						
				005L	01L	02L	04L	06L	08L	10L
Repetitive Peak Reverse Voltage	$V_{RRM}$	V		50	100	200	400	600	800	1000
Average Rectified Output Current	$I_o$	A	60Hz sine wave, R-load	With heatsink $T_c = 100^\circ\text{C}$						
				Without heatsink $T_a = 25^\circ\text{C}$						
Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	60Hz sine wave, 1 cycle, $T_j = 25^\circ\text{C}$	350						
Current Squared Time	$I^2t$	$\text{A}^2\text{S}$	$1\text{ms} \leq t < 8.3\text{ms}$ $T_j = 25^\circ\text{C}$ , Rating of per diode	508						
Storage Temperature	$T_{stg}$	$^\circ\text{C}$		-55 ~ +150						
Junction Temperature	$T_j$	$^\circ\text{C}$		-55 ~ +150						
Dielectric Strength	$V_{dis}$	KV	Terminals to case, AC 1 minute	2.5						
Mounting Torque	Tor	$\text{kg} \cdot \text{cm}$	Recommend torque: $5\text{kg} \cdot \text{cm}$	8						

#### Electrical Characteristics ( $T_a = 25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	Max
Peak Forward Voltage	$V_{FM}$	V	$I_{FM} = 12.5\text{A}$ , Pulse measurement, Rating of per diode	0.92
Peak Reverse Current	$I_{RRM}$	$\mu\text{A}$	$V_{RM} = V_{RRM}$ , Pulse measurement, Rating of per diode	5
Thermal Resistance	$R_{\theta J-A}$	$^\circ\text{C}/\text{W}$	Between junction and ambient, Without heatsink	22
	$R_{\theta J-C}$		Between junction and case, With heatsink	1.2

# Typical Characteristics

FIG.1-MAXIMUM FORWARD SURGE CURRENT

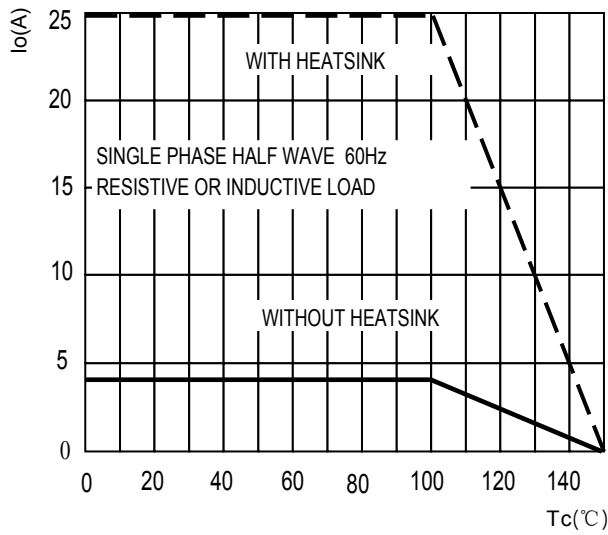


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

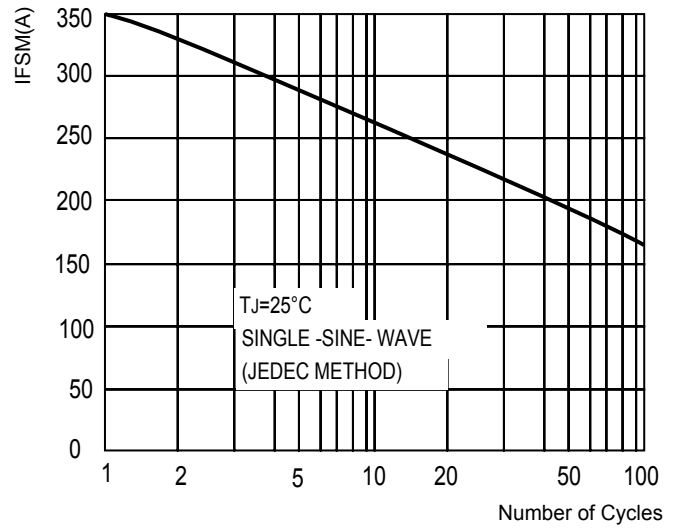


FIG.3-TYPICAL FORWARD CHARACTERISTICS

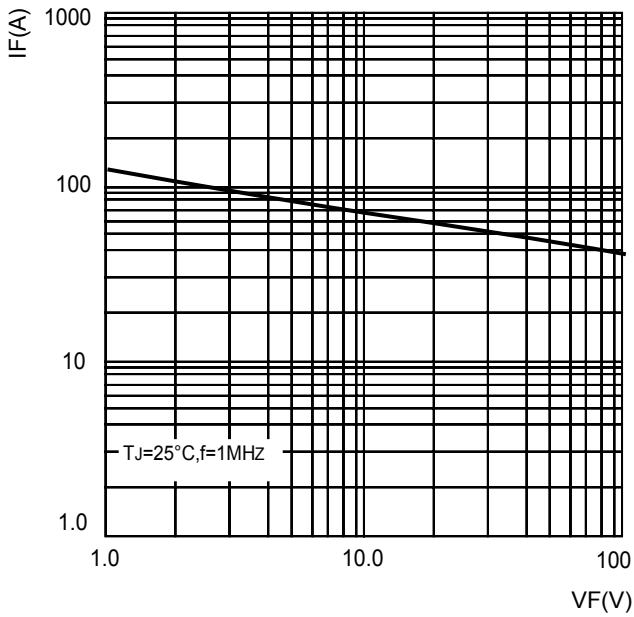


FIG.4-TYPICAL REVERSE CHARACTERISTICS



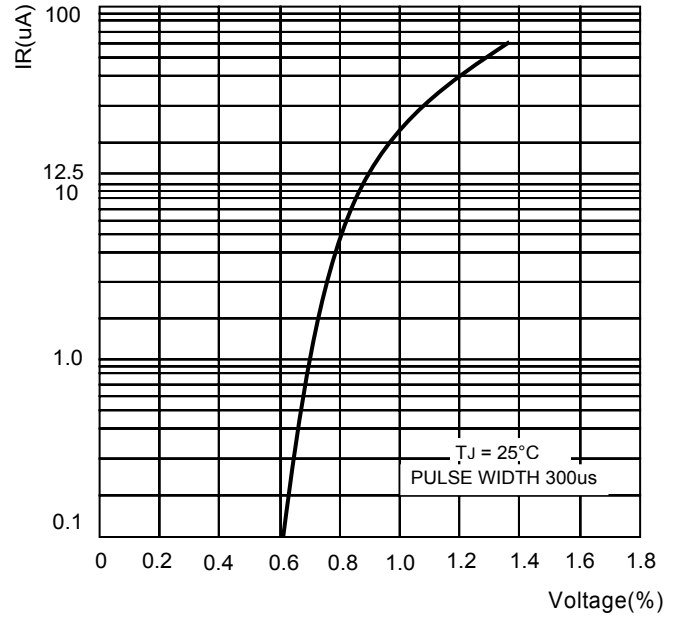


FIG.5-TYPICAL JUNCTION CAPACITANCE

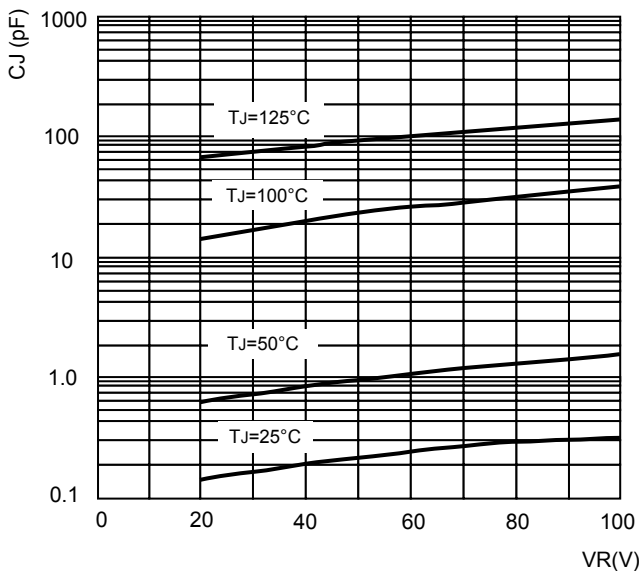

# GBJ Package Outline Dimensions

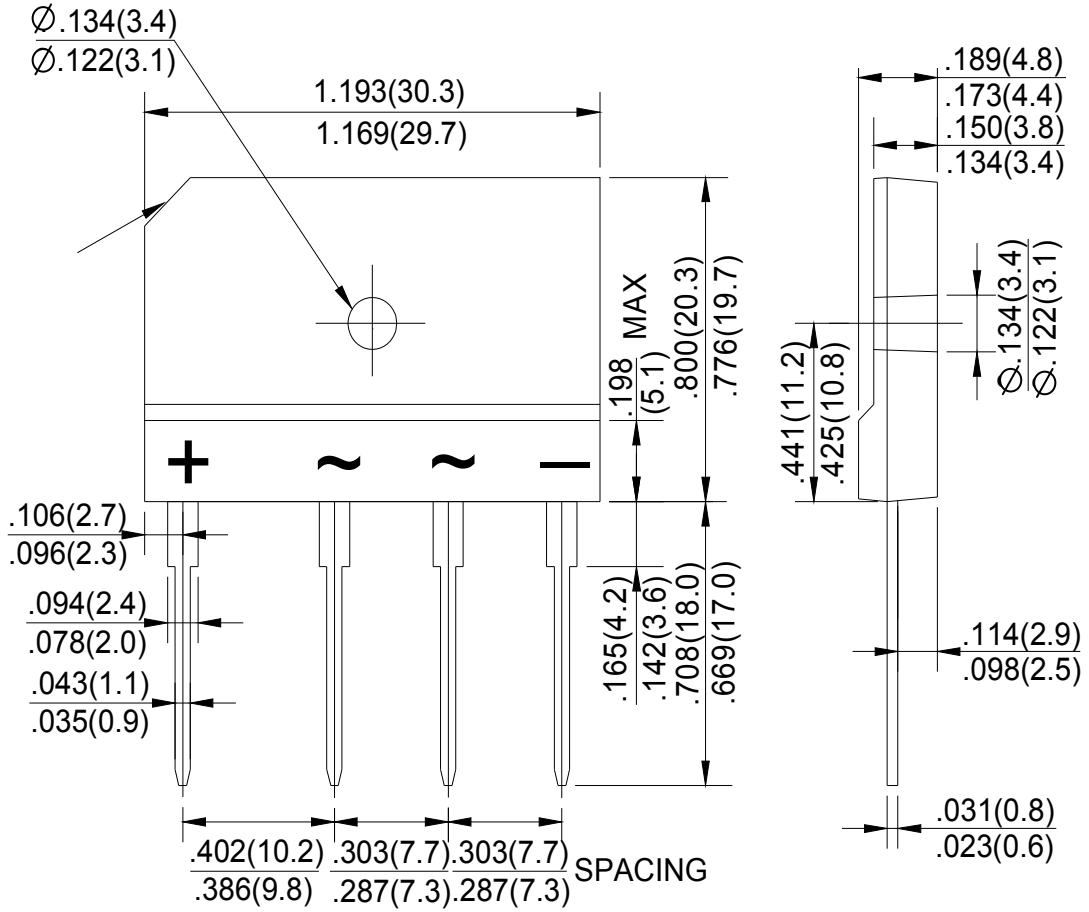

Dimensions in inches and (millimeters)