



DONGGUAN NANJING ELECTRONICS LTD.,

SOT-23!* @Plastic-Encapsulate Transistors

MT720A TRANSISTOR (PNP)

FEATURE

- Switching transistor
- Extremely low saturation voltage



APPLICATION

- Gate Driving MOSFETs and IGBTs
- DC-DC converters
- Charging circuit
- Power switches

MARKING: 720

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

| Symbol | Parameter | Value | Unit |
|-----------------|--|----------|---------------------------|
| V_{CBO} | Collector-Base Voltage | -40 | V |
| V_{CEO} | Collector-Emitter Voltage | -40 | V |
| V_{EBO} | Emitter-Base Voltage | -5 | V |
| I_B | Base Current | -0.5 | A |
| I_{c^*} | Collector Current -Continuous | -2 | A |
| I_{CM} | Peak Pulse Current | -4 | A |
| P_C | Total Collector Dissipation | 500 | mW |
| $R_{\theta JA}$ | Thermal Resistance from Junction to Ambient | 357 | $^\circ\text{C}/\text{W}$ |
| T_J, T_{stg} | Operation Junction and Storage Temperature Range | -55~+150 | $^\circ\text{C}$ |







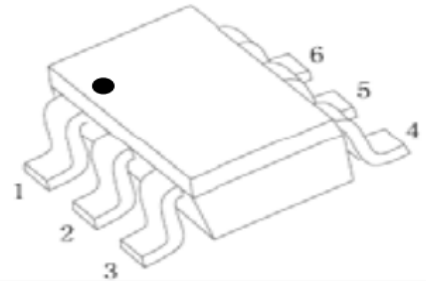



SOT23-6L


ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|--------------------------------------|----------------------------|--|-----|-----|------|------|
| Collector-base breakdown voltage | V _{(BR)CBO} | I _C =-100μA, I _E =0 | -40 | | | V |
| Collector-emitter breakdown voltage | V _{(BR)CEO} * | I _C = -10mA, I _B =0 | -40 | | | V |
| Emitter-base breakdown voltage | V _{(BR)EBO} | I _E = -100μA, I _C =0 | -5 | | | V |
| Collector cut-off current | I _{CBO} | V _{CB} =-35V, I _E =0 | | | -0.1 | μA |
| Collector cut-off current | I _{CES} | V _{CE} =-35V, V _{BE} =0 | | | -0.1 | μA |
| Emitter cut-off current | I _{EBO} | V _{EB} = -4V, I _C =0 | | | -0.1 | μA |
| DC current gain | h _{FE(1)} * | V _{CE} = -2V, I _C =-10mA | 300 | | | |
| | h _{FE(2)} * | V _{CE} =-2V, I _C =-100mA | 300 | | | |
| | h _{FE(3)} * | V _{CE} =-2V, I _C =-1A | 180 | | | |
| | h _{FE(4)} * | V _{CE} =-2V, I _C =-1.5A | 60 | | | |
| | h _{FE(5)} * | V _{CE} =-2V, I _C =-3A | 12 | | | |
| Collector-emitter saturation voltage | V _{CE(sat) (1)} * | I _C =-0.1A, I _B =-10mA | | | -40 | mV |
| | V _{CE(sat) (2)} * | I _C =-1A, I _B =-50mA | | | -220 | mV |
| | V _{CE(sat) (3)} * | I _C =-2A, I _B =-200mA | | | -350 | mV |
| Base-emitter saturation voltage | V _{BE(sat)} * | I _C =-2A, I _B = -200mA | | | -1.2 | V |
| Base-emitter voltage | V _{BE(on)} * | V _{CE} =-2V, I _C =-1.5A | | | -1 | V |
| Transition frequency | f _T | V _{CE} =-10V, I _C =-50mA, f=100MHz | 150 | | | MHz |
| Collector output capacitance | C _{ob} | V _{CB} =-10V, f=1MHz | | | 25 | pF |
| Turn-on Time | t _(on) | V _{CC} =-15V, I _C =-0.75A, I _{B1} = I _{B2} =-15mA | | 40 | | ns |
| Turn-off Time | t _(off) | | | 435 | | ns |

*Measured under pulse conditions . Pulse width =300μs. Duty cycle≤2%.

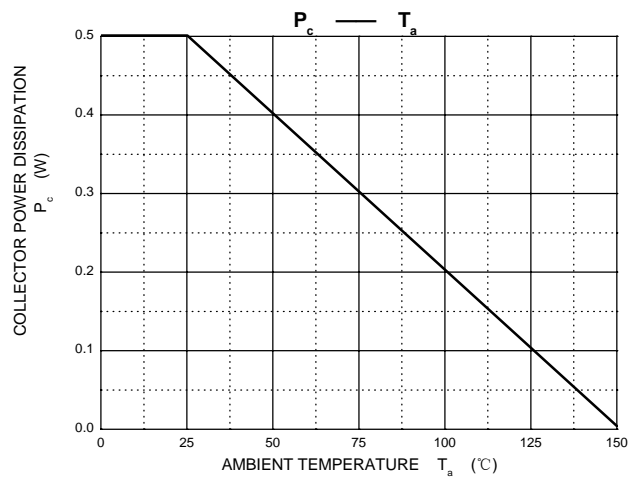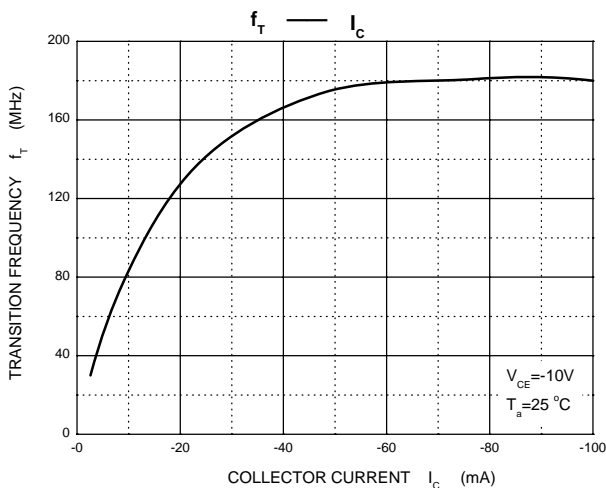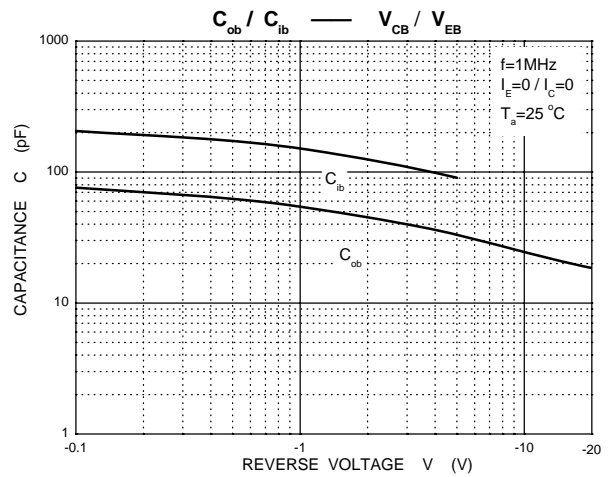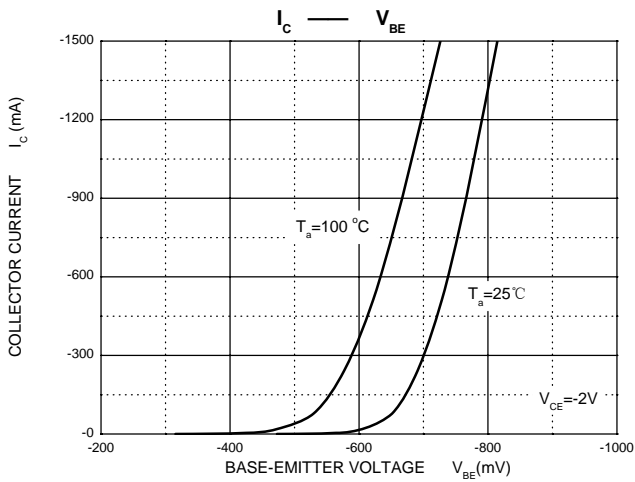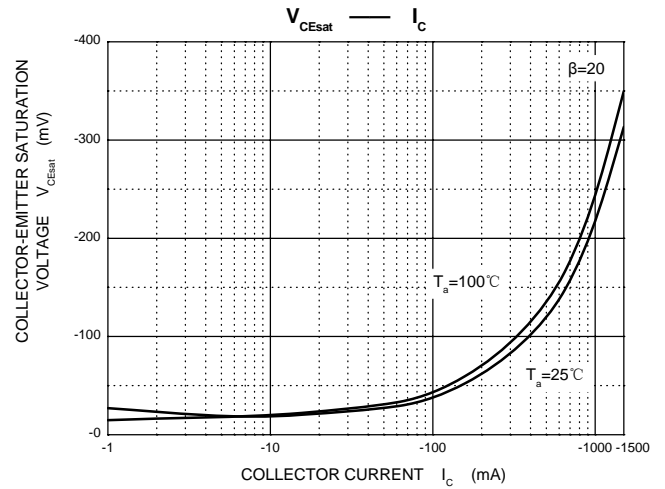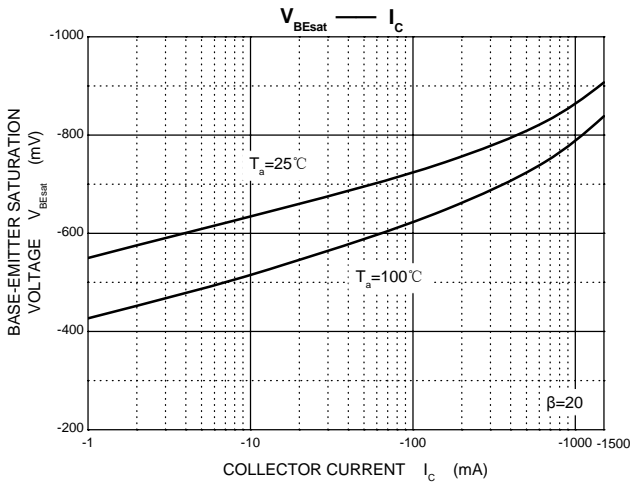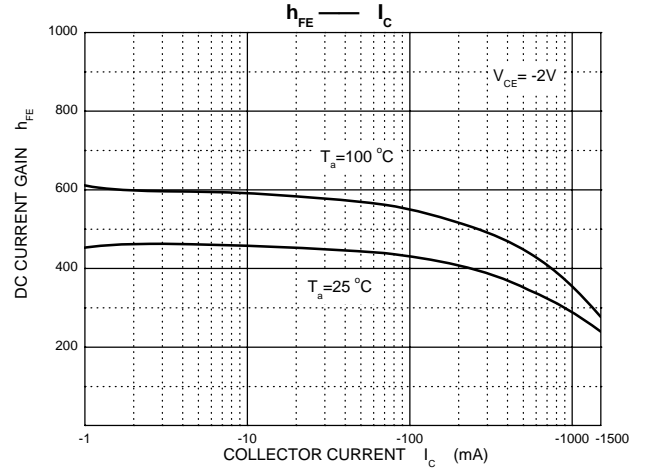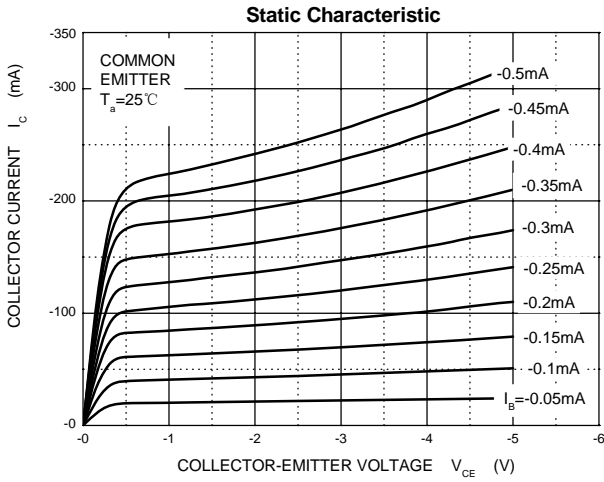


SOT-23-6L Package Outline Dimensions

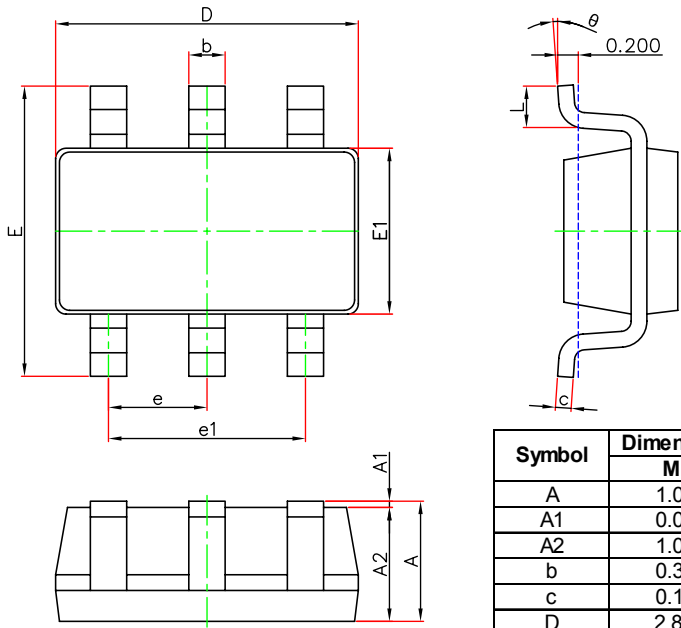

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E1 | 1.500 | 1.700 | 0.059 | 0.067 |
| E | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

SOT-23-6L Suggested Pad Layout

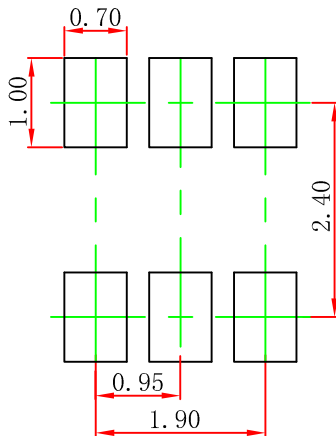


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.

SOT-23-6L Tape and Reel

SOT-23-6L Embossed Carrier Tape

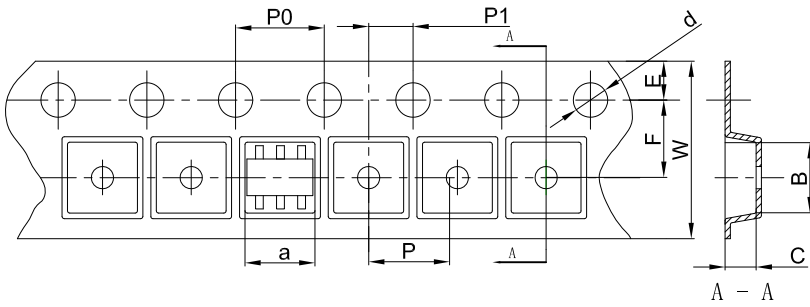


Packaging Description:


SOT-23-6L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 18.0cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter | | | | | | | | | | |
|------------------------------|------|------|------|-------|------|------|------|------|------|------|
| Pkg type | a | B | C | d | E | F | P0 | P | P1 | W |
| SOT-23-6L | 3.17 | 3.23 | 1.37 | Ø1.55 | 1.75 | 3.50 | 4.00 | 4.00 | 2.00 | 8.00 |

SOT-23-6L Tape Leader and Trailer

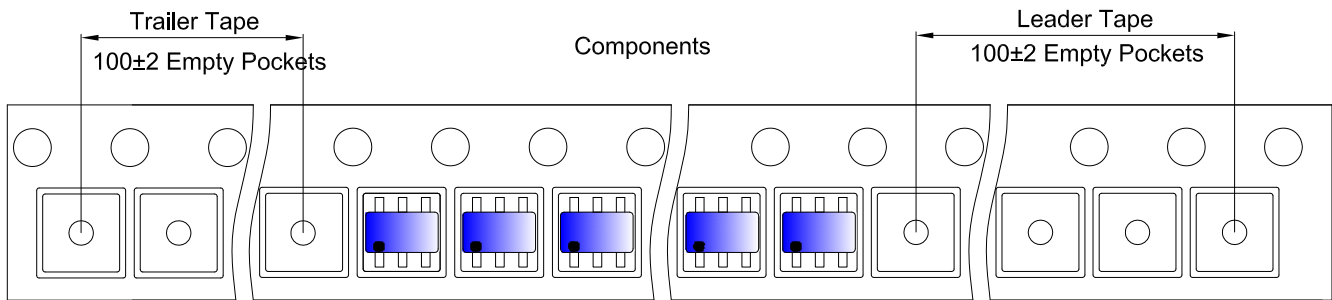

SOT-23-6L Reel

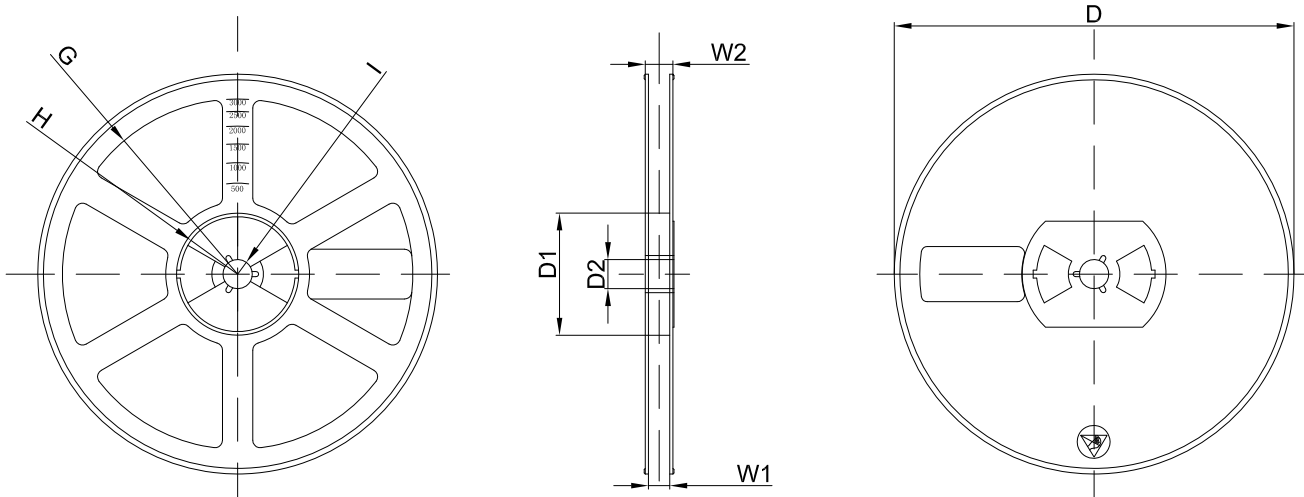

| Dimensions are in millimeter | | | | | | | | |
|------------------------------|---------|-------|-------|--------|--------|-------|------|-------|
| Reel Option | D | D1 | D2 | G | H | I | W1 | W2 |
| 7" Dia | Ø180.00 | 60.00 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 13.10 |

| REEL | Reel Size | Box | Box Size(mm) | Carton | Carton Size(mm) | G.W.(kg) |
|----------|-----------|------------|--------------|-------------|-----------------|----------|
| 3000 pcs | 7 inch | 30,000 pcs | 203×203×195 | 120,000 pcs | 438×438×220 | |