



DONGGUAN NANJING ELECTRONICS LTD.,  
**TO-247-3 Silicon Carbide Diode**

**NJ12030U3** SiC Diode 1200V, 30A, 88nC

### General Description

This product family offers state of the art performance. It is designed for high frequency applications here high efficiency and high reliability are required.

### Features


- Max junction temperature 175°C
- High surge current capacity
- Zero reverse recovery current
- Zero forward recovery voltage
- High frequency operation
- Temperature independent switching behavior
- Positive temperature coefficient on  $V_F$



**TO-247-3  
Pin definition**

### Applications

- Solar booster
- Inverter free wheeling diode
- Vienna 3-Phase PFC
- EV charger piles
- Switch Mode Power Supplies



### Key performance parameters

Type	$V_{RRM}$	$I_F$ $T_C=153^\circ\text{C}$	$Q_C$
NJ12030U3	1200V	30A	88nC

Caution: This device is sensitive to electrostatic discharge .Users should follow ESD handling procedures.

## Typical Characteristics

---

### Maximum Ratings

$T_C=25^{\circ}\text{C}$ , unless otherwise specified

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$	1200	V
DC Peak Reverse Voltage	$V_{DC}$	1200	V

### Maximum Ratings

$T_C=25^{\circ}\text{C}$ , unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous Forward Current: $T_C = 25^{\circ}\text{C}$ $T_C = 153^{\circ}\text{C}$	$I_F$	44* 15*	A
Non-Repetitive Forward Surge Current: Sine half wave $T_C = 25^{\circ}\text{C}$ $t_p = 10\text{ms}$	$I_{FSM}$	120*	A
Power Dissipation: $T_C = 25^{\circ}\text{C}$ $T_C = 150^{\circ}\text{C}$	$P_{tot}$	220* 36*	W
$I^2t$ value : $T_C = 25^{\circ}\text{C}$ $t_p = 10\text{ms}$	$\int i^2 dt$	72*	$\text{A}^2\text{S}$
Operating Junction Range	$T_j$	-55 to +175	$^{\circ}\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +175	$^{\circ}\text{C}$

\*Per Leg

## Typical Characteristics

### Thermal Resistance

Parameter	Symbol	Typ.	Unit
Thermal resistance of crust	$R_{thJC}$	0.68*	°C/W

\*Per Leg

### Electrical Characteristics

$T_C = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Value			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	$V_F$		1.56* 2.2*	1.8* 3*	V	$I_F = 15\text{A}$ $T_j = 25^\circ\text{C}$ $T_j = 175^\circ\text{C}$
Reverse Current	$I_R$		5* 30*	80* 300*	uA	$V_R = 1200\text{V}$ $T_j = 25^\circ\text{C}$ $T_j = 175^\circ\text{C}$
Total Capacitive Charge	$Q_C$		88*		nC	$V_R = 800\text{V}$ $T_j = 25^\circ\text{C}$ $Q_C = \int_0^{V_R} C(V)dV$
Total Capacitance	C		888* 83* 58.5*		pF	$T_j = 25^\circ\text{C}$ , $f = 1\text{MHz}$ $V_R = 1\text{V}$ $V_R = 400\text{V}$ $V_R = 800\text{V}$

\*Per Leg

Characteristics Curves

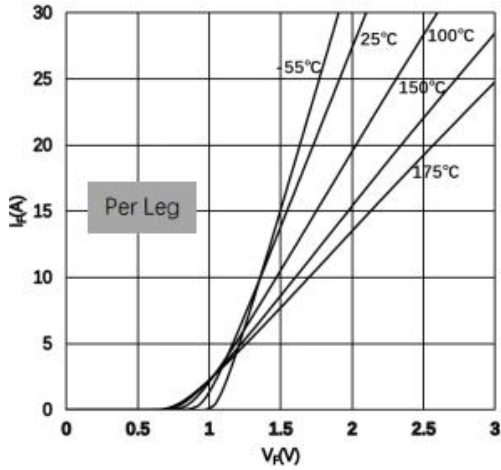


Fig. 1 Typical forward characteristic curve

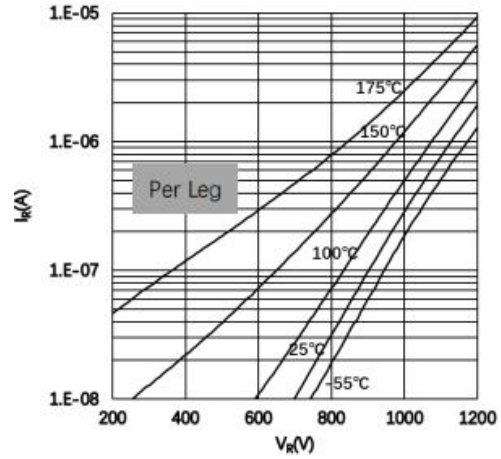


Fig. 2 Typical reverse characteristic curve

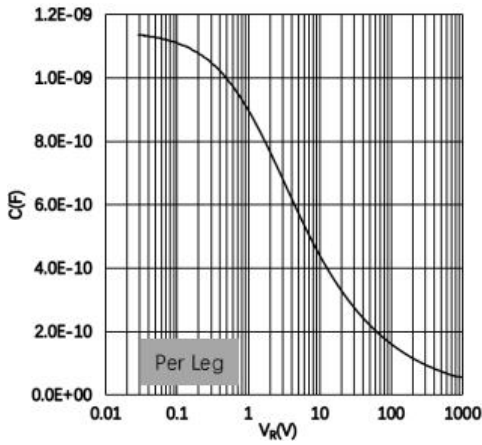


Fig. 3 Typical capacitance and reverse voltage curve

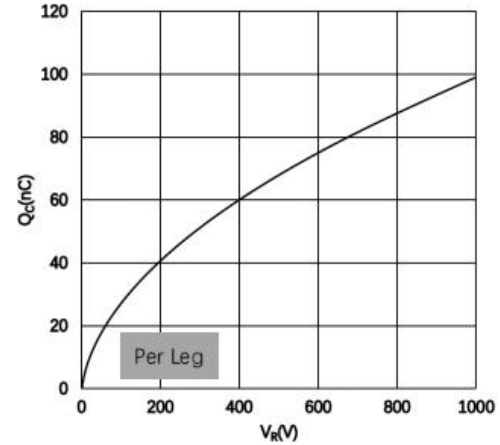


Fig. 4 Typical storage charge and reverse voltage curve

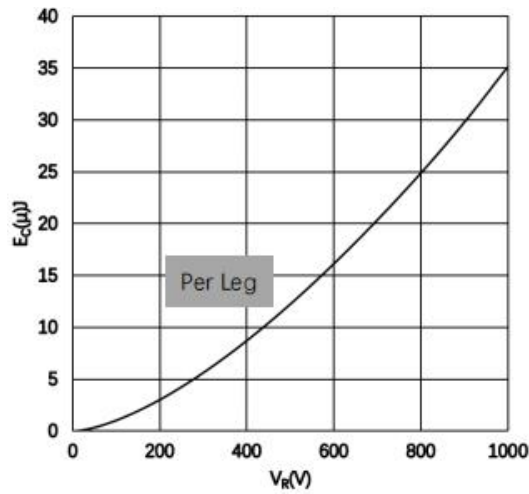


Fig. 5 Typical capacitance energy and reverse voltage curve

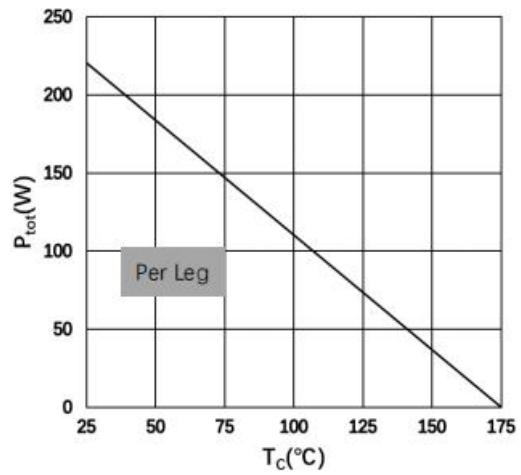


Fig. 6 Typical power derating curve

# Typical Characteristics

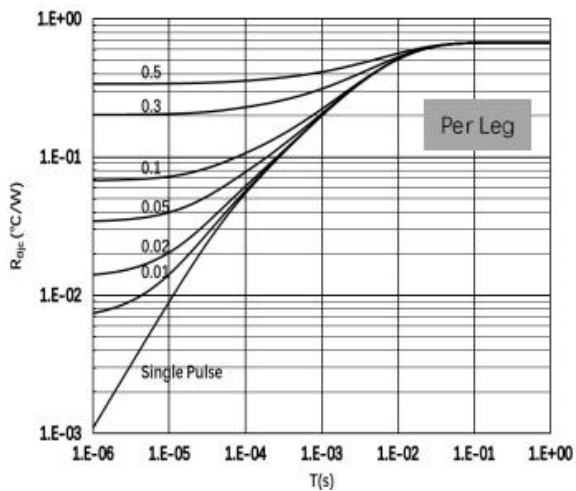


Fig. 7 Transient thermal impedance


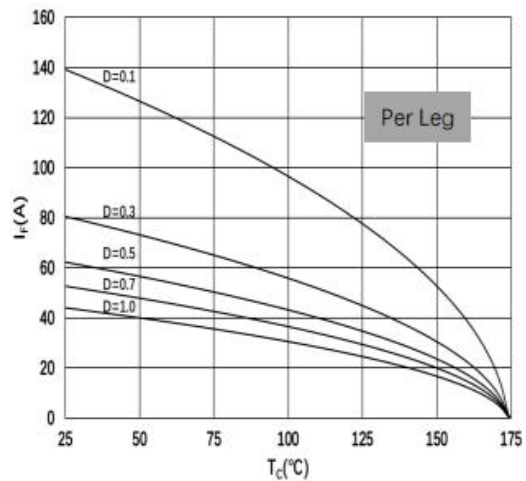



Fig. 8 Current curve under different loads

Package Outline:TO-247-3

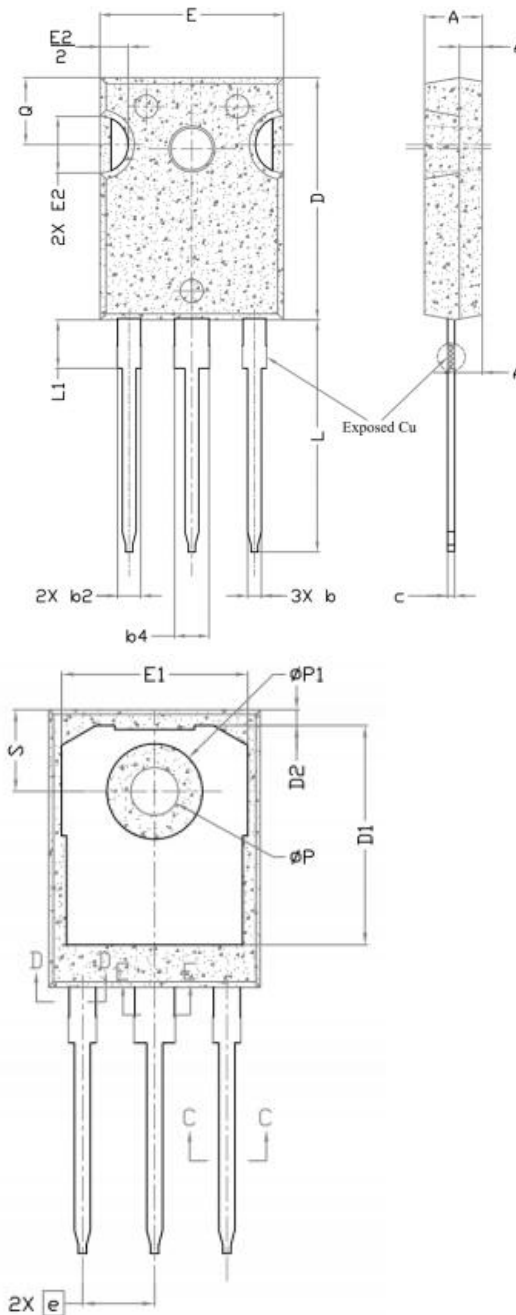

SYMBOL	DIMENSIONS			NOTES
	MIN.	NOM.	MAX.	
A	4.83	5.02	5.21	
A1	2.29	2.41	2.55	
A2	1.50	2.00	2.49	
b	1.12	1.20	1.33	
b1	1.12	1.20	1.28	
b2	1.91	2.00	2.39	6
b3	1.91	2.00	2.34	
b4	2.87	3.00	3.22	6, 8
b5	2.87	3.00	3.18	
c	0.55	0.60	0.69	6
c1	0.55	0.60	0.65	
D	20.80	20.95	21.10	4
D1	16.25	16.55	17.65	5
D2	0.51	1.19	1.35	
E	15.75	15.94	16.13	4
E1	13.46	14.02	14.16	5
E2	4.32	4.91	5.49	3
e	5.44BSC			
L	19.81	20.07	20.32	
L1	4.10	4.19	4.40	6
∅P	3.56	3.61	3.65	7
∅P1	7.19REF.			
Q	5.39	5.79	6.20	
S	6.04	6.17	6.30	

Dimensions in (mm)



Section C-C, D-D, E-E