



KBL Plastic-Encapsulate Bridge Rectifier

KBL6005 THRU KBL610

General Purpose Bridge Rectifier

Features


- I_O 6A
- V_{RRM} 50V-1000V
- High surge current capability
- Glass passivated chip

Applications

- General purpose 1 phase Bridge rectifier applications

Marking

- KBL6XX
- XX : From 005 To 10

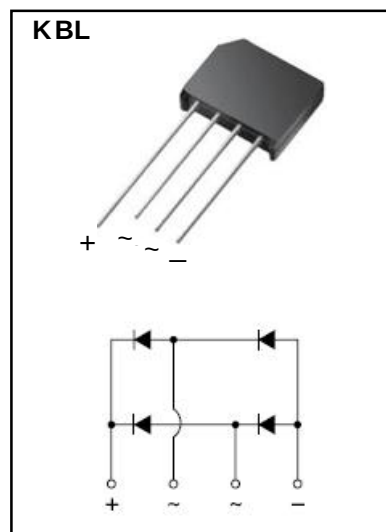

Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	KBL6						
				005	01	02	04	06	08	10
Repetitive Peak Reverse Voltage	V _{RRM}	V		50	100	200	400	600	800	1000
Average Rectified Output Current	I _O	A	60Hz sine wave, R-load T _a =40℃	6						
Surge(Non-repetitive)Forward Current	I _{FSM}	A	60Hz half-sine wave, 1 cycle, T _j =25℃	150						
Current Squared Time	I ² t	A ² S	1ms≤t<8.3ms T _j =25℃, Rating of per diode	93.375						
Storage Temperature	T _{stg}	℃		-55 ~+150						
Junction Temperature	T _j	℃		-55 ~+150						

Electrical Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	Max
Peak Forward Voltage	V_{FM}	V	$I_{FM}=6.0\text{A}$, Pulse measurement, Rating of per diode	1.1
Peak Reverse Current	I_{RRM}	μA	$V_{RM}=V_{RRM}$, Pulse measurement, Rating of per diode	10
Thermal Resistance	$R_{\theta J-A}$	$^{\circ}\text{C}/\text{W}$	Between junction and ambient	9
	$R_{\theta J-C}$		Between junction and case	2.4

Typical Characteristics

FIG.1-MAXIMUM NON-REPETITIVE SURGE CURRENT

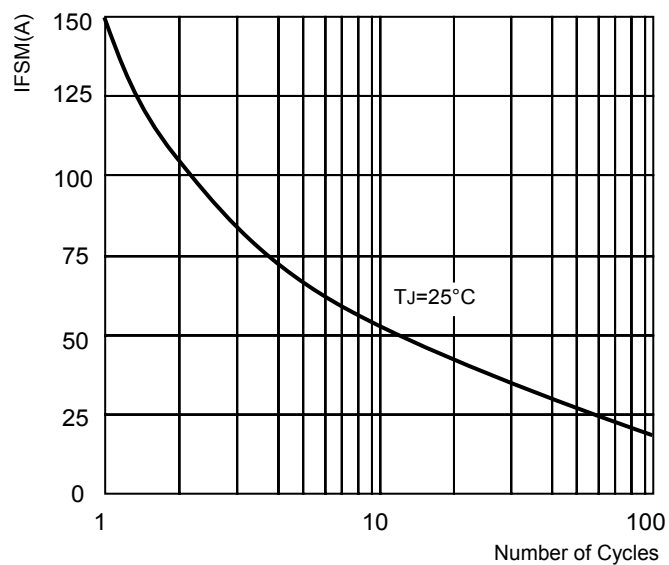


FIG.2-FORWARD CURRENT DERATING CURVE

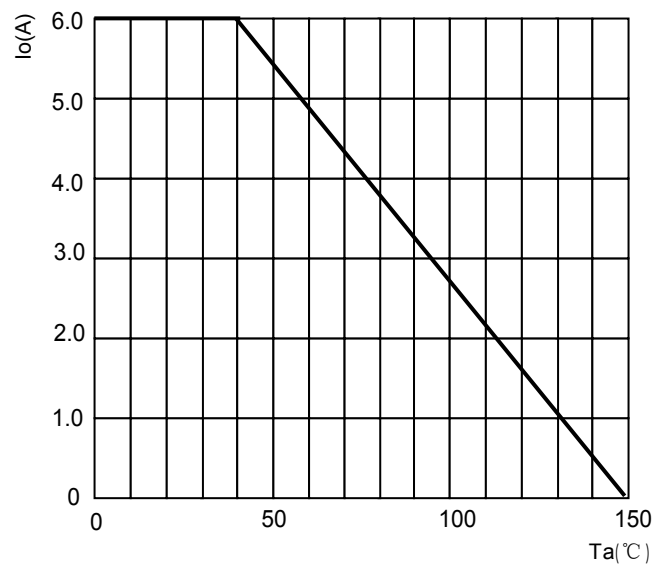


FIG.3-TYPICAL FORWARD CHARACTERISTICS



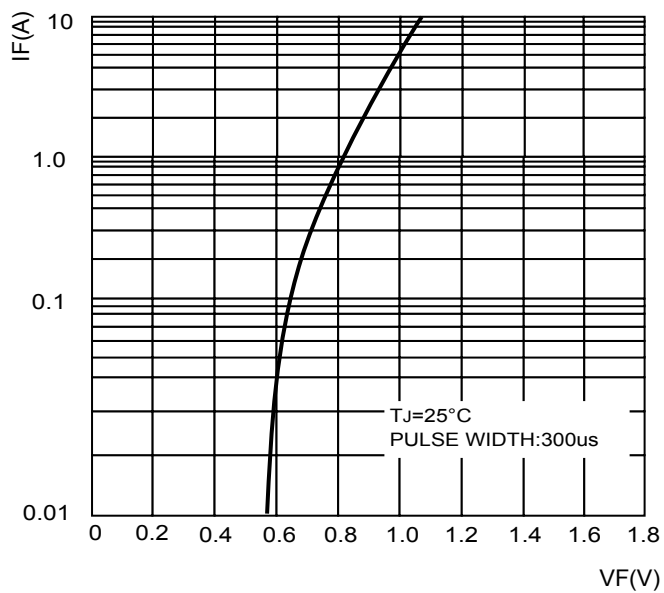


FIG.4-TYPICAL REVERSE CHARACTERISTICS

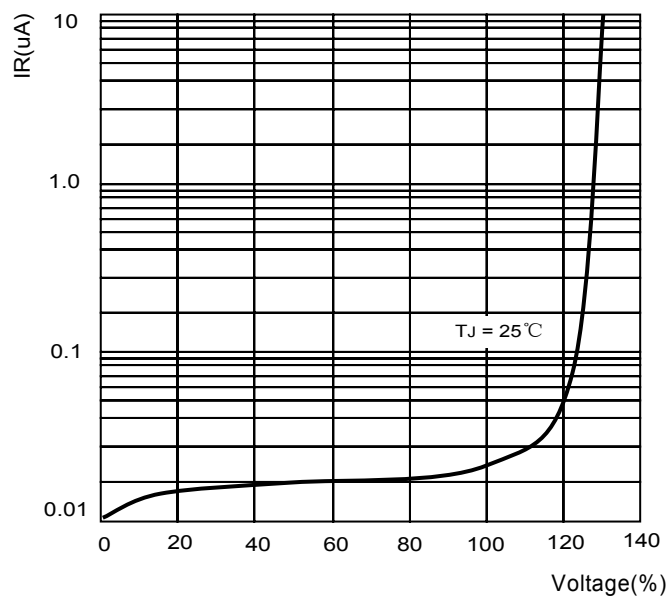

KBL Package Outline Dimensions

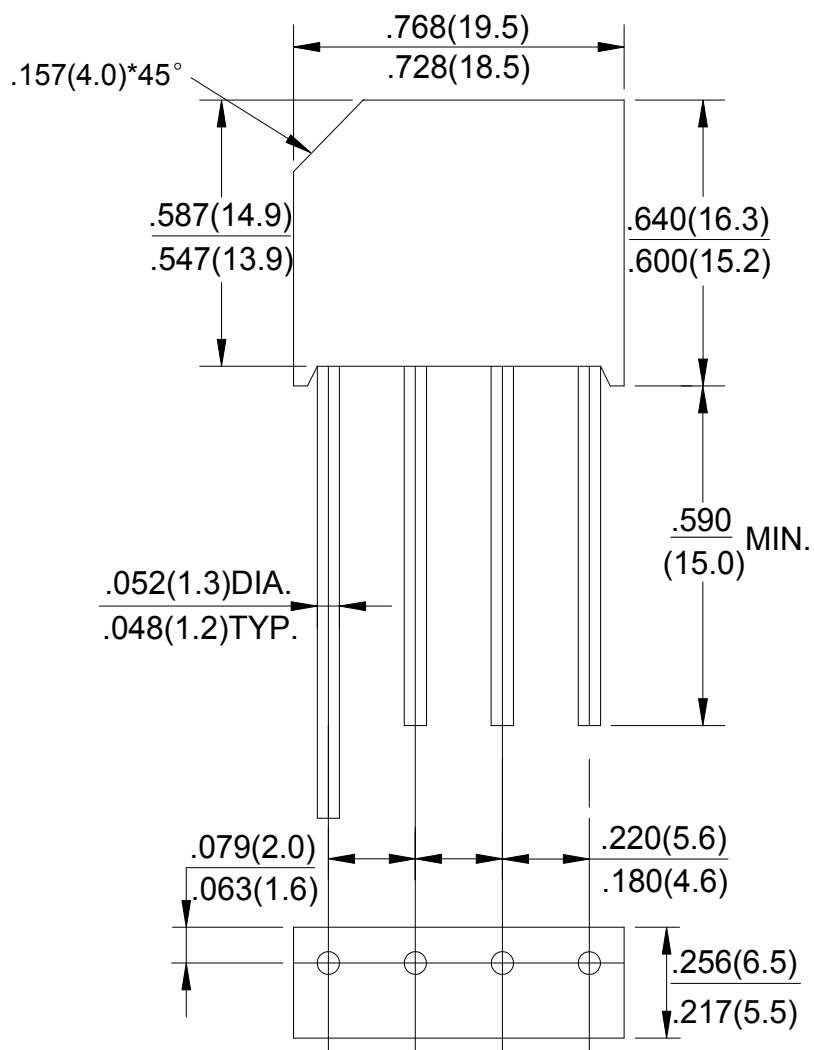

Dimensions in inches and (millimeters)