




DONGGUAN NANJING ELECTRONICS LTD.,
SOT-523 Plastic-Encapsulate Diode

1SS362

Switching Diodes

■ Features

- Fast Switching Speed
- Low Forward Voltage
- Fast Reverse Recovery Time
- Small Total Capacitance

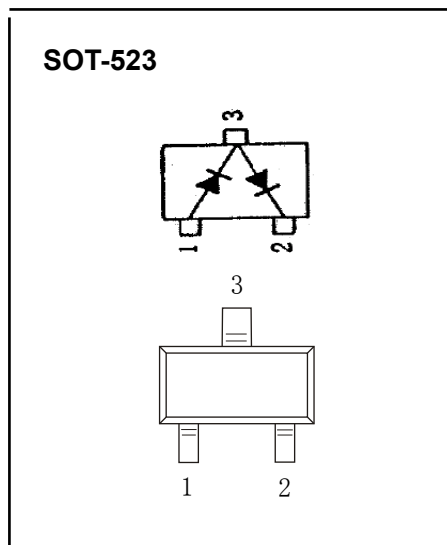

■ Absolute Maximum Ratings Ta = 25°C


Parameter	Symbol	Rating	Unit
Peak Reverse Voltage	V _{RM}	85	V
Reverse Voltage	V _R	80	
Average Rectified Output Current	I _O	80	mA
Forward Continuous Current	I _{FM}	240	
Peak Forward Surge Current @ t=10ms	I _{FSM}	1	A
Power Dissipation	P _d	100	mW
Junction Temperature	T _J	125	°C
Storage Temperature range	T _{stg}	-55 to 125	

■ Electrical Characteristics Ta = 25°C


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	V _R	I _R = 100uA	80			V
Forward voltage	V _{F1}	I _F = 1mA		0.63		
	V _{F2}	I _F = 10 mA		0.75		
	V _{F3}	I _F = 100 mA			1.2	
Reverse voltage leakage current	I _{R1}	V _R = 30 V			0.1	uA
	I _{R2}	V _R = 80 V			0.5	
Junction capacitance	C _j	V _R = 0 V, f= 1 MHz			3	pF
Reverse recovery time	t _{rr}	I _F =10mA			4	ns

Typical Characteristics

Typical Characteristics

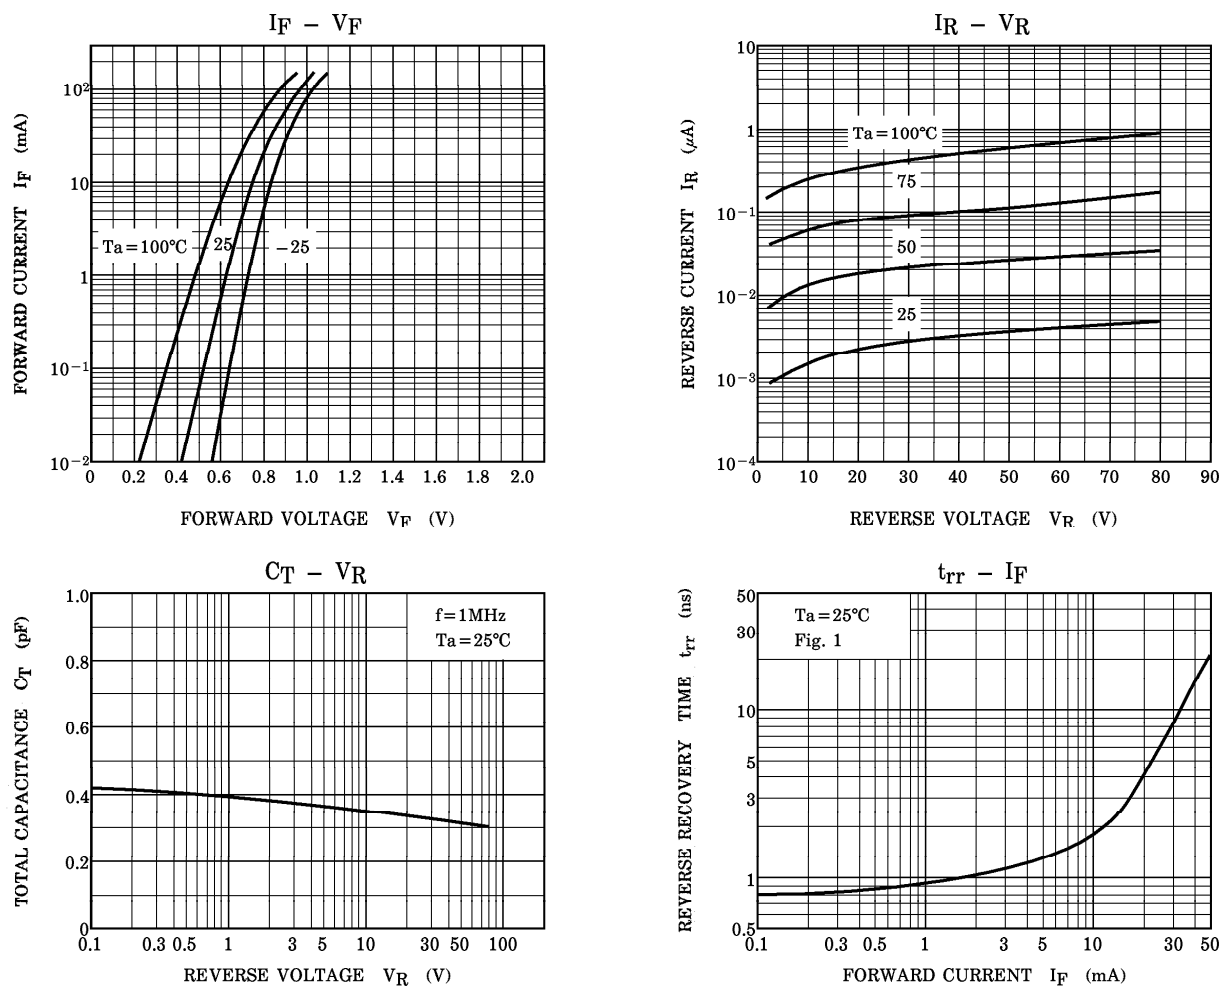


SOT-523 Package Outline Dimensions

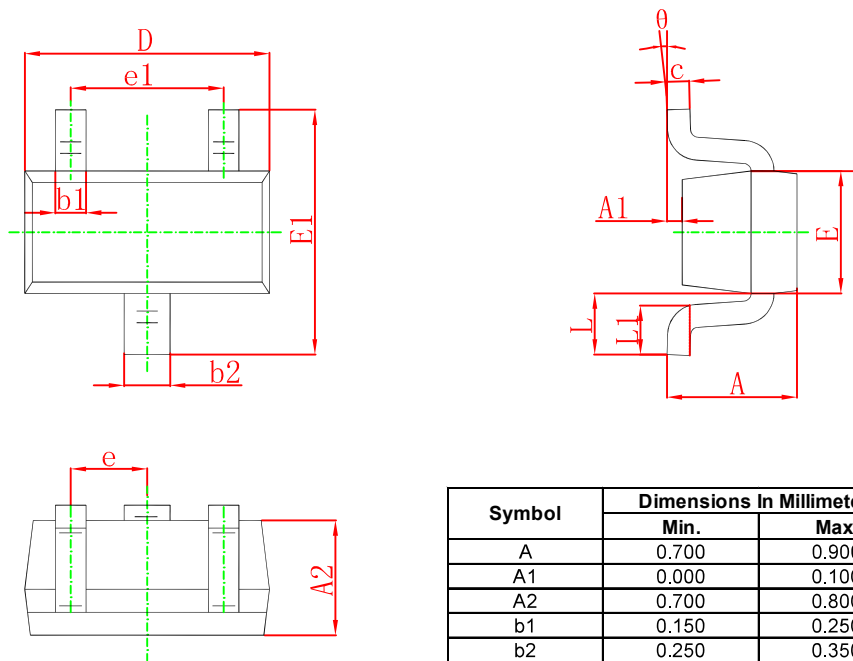

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°


SOT-523 Suggested Pad Layout



- Note:
- 1.Controlling dimension:in millimeters.
 - 2.General tolerance:±0.05mm.
 - 3.The pad layout is for reference purposes only.

SOT-523 Tape and Reel


SOT-523 Embossed Carrier Tape

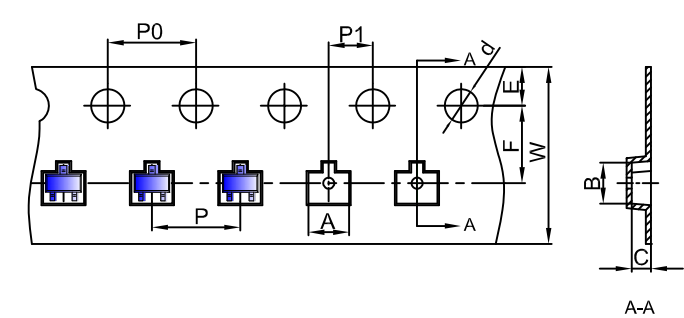


Packaging Description:
SOT-523 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-523	1.85	1.85	0.875	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-523 Tape Leader and Trailer

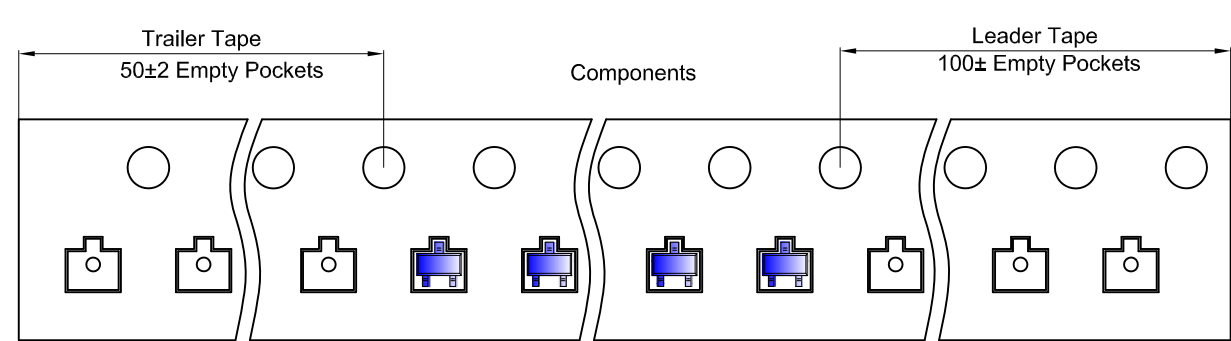

SOT-523 Reel

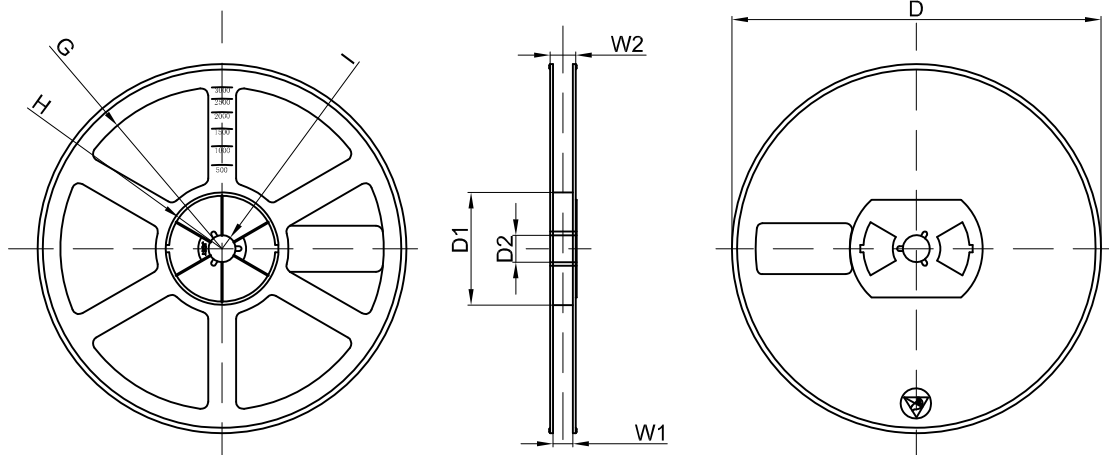

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	