



**SOT-23-6L Plastic-Encapsulate Transistors****MMDT2227** DUAL TRANSISTOR (NPN+PNP)**FEATURE**

- Epitaxial planar die construction
- One 2222A NPN
One 2907A PNP
- Ideal for power amplification and switching

MARKING: K27**NPN 2222A****MAXIMUM RATINGS** ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	75	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	600	mA
P_C	Collector Power Dissipation	200	mW
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	$^{\circ}\text{C}$

**SOT-23-6L****ELECTRICAL CHARACTERISTICS** ($T_a=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 10\mu\text{A}, I_E = 0$	75		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 10\text{mA}, I_B = 0$	40		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	6		V
Collector cut-off current	I_{CBO}	$V_{CB} = 60\text{V}, I_E = 0$		10	nA
Collector cut-off current	I_{CEX}	$V_{CE} = 60\text{V}, V_{EB(off)} = 3\text{V}$		10	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = 3\text{V}, I_C = 0$		10	nA
DC current gain	$h_{FE(1)}$	$V_{CE} = 10\text{V}, I_C = 0.1\text{mA}$	35		
	$h_{FE(2)}$	$V_{CE} = 10\text{V}, I_C = 1\text{mA}$	50		
	$h_{FE(3)}$	$V_{CE} = 10\text{V}, I_C = 10\text{mA}$	75		
	$h_{FE(4)}$	$V_{CE} = 10\text{V}, I_C = 150\text{mA}$	100	300	
	$h_{FE(5)}$	$V_{CE} = 10\text{V}, I_C = 500\text{mA}$	40		
	$h_{FE(6)}$	$V_{CE} = 1\text{V}, I_C = 150\text{mA}$	35		
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C = 150\text{mA}, I_B = 15\text{mA}$		0.3	V
	$V_{CE(sat)2}$	$I_C = 500\text{mA}, I_B = 50\text{mA}$		1	V
Base-emitter saturation voltage	$V_{BE(sat)1}$	$I_C = 150\text{mA}, I_B = 15\text{mA}$	0.6	1.2	V
	$V_{BE(sat)2}$	$I_C = 500\text{mA}, I_B = 50\text{mA}$		2	V
Transition frequency	f_T	$V_{CE} = 20\text{V}, I_C = 20\text{mA}, f = 100\text{MHz}$	300		MHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}, I_E = 0, f = 1\text{MHz}$		8	pF
Input Capacitance	C_{ib}	$V_{EB} = 0.5\text{V}, I_C = 0, f = 1\text{MHz}$		25	pF
Noise Figure	NF	$V_{CE} = 10\text{V}, I_C = 100\mu\text{A}, f = 1\text{KHz}, R_s = 1\text{K}\Omega$		4	dB

*pulse test

ELECTRICAL CHARACTERISTICS(Ta=25°C)

Switching characteristics

Parameter	Symbol	Test conditions	Min	Max	Unit
Delay time	t_d	$V_{CC}=30V, I_C=150mA,$ $V_{BE(off)}=0.5V, I_{B1}=15mA$		10	ns
Rise time	t_r			25	ns
Storage time	t_s			225	ns
Fall time	t_f			60	ns

PNP 2907A

MAXIMUM RATINGS (Ta=25°C unless otherwise noted)



Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-60	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-600	mA
P_C	Collector Power Dissipation	200	mW
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -10\mu A, I_E = 0$	-60		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-60		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -10\mu A, I_C = 0$	-5		V
Collector cut-off current	I_{CBO}	$V_{CB} = -50V, I_E = 0$		-10	nA
Collector cut-off current	I_{CEX}	$V_{CE} = -30V, V_{EB(off)} = -0.5V$		-50	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = -3V, I_C = 0$		-10	nA
DC current gain	$h_{FE(1)}$ *	$V_{CE} = -10V, I_C = -0.1mA$	75		
	$h_{FE(2)}$ *	$V_{CE} = -10V, I_C = -1mA$	100		
	$h_{FE(3)}$ *	$V_{CE} = -10V, I_C = -10mA$	100		
	$h_{FE(4)}$ *	$V_{CE} = -10V, I_C = -150mA$	100	300	
	$h_{FE(5)}$ *	$V_{CE} = -10V, I_C = -500mA$	50		
Collector-emitter saturation voltage	$V_{CE(sat)1}$ *	$I_C = -150mA, I_B = -15mA$		-0.4	V
	$V_{CE(sat)2}$ *	$I_C = -500mA, I_B = -50mA$		-1.6	V
Base-emitter saturation voltage	$V_{BE(sat)1}$ *	$I_C = -150mA, I_B = -15mA$		-1.3	V
	$V_{BE(sat)2}$ *	$I_C = -500mA, I_B = -50mA$		-2.6	V
Transition frequency	f_T	$V_{CE} = -20V, I_C = -50mA, f = 100MHz$	200		MHz
Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$		8	pF
Input Capacitance	C_{ib}	$V_{EB} = -2V, I_C = 0, f = 1MHz$		30	pF
Delay time	t_d	$V_{CC} = -30V, I_C = -150mA, I_{B1} = -15mA$		10	ns
Rise time	t_r			40	ns
Storage time	t_s			225	ns
Fall time	t_f			60	ns

*pulse test

Typical Characteristics

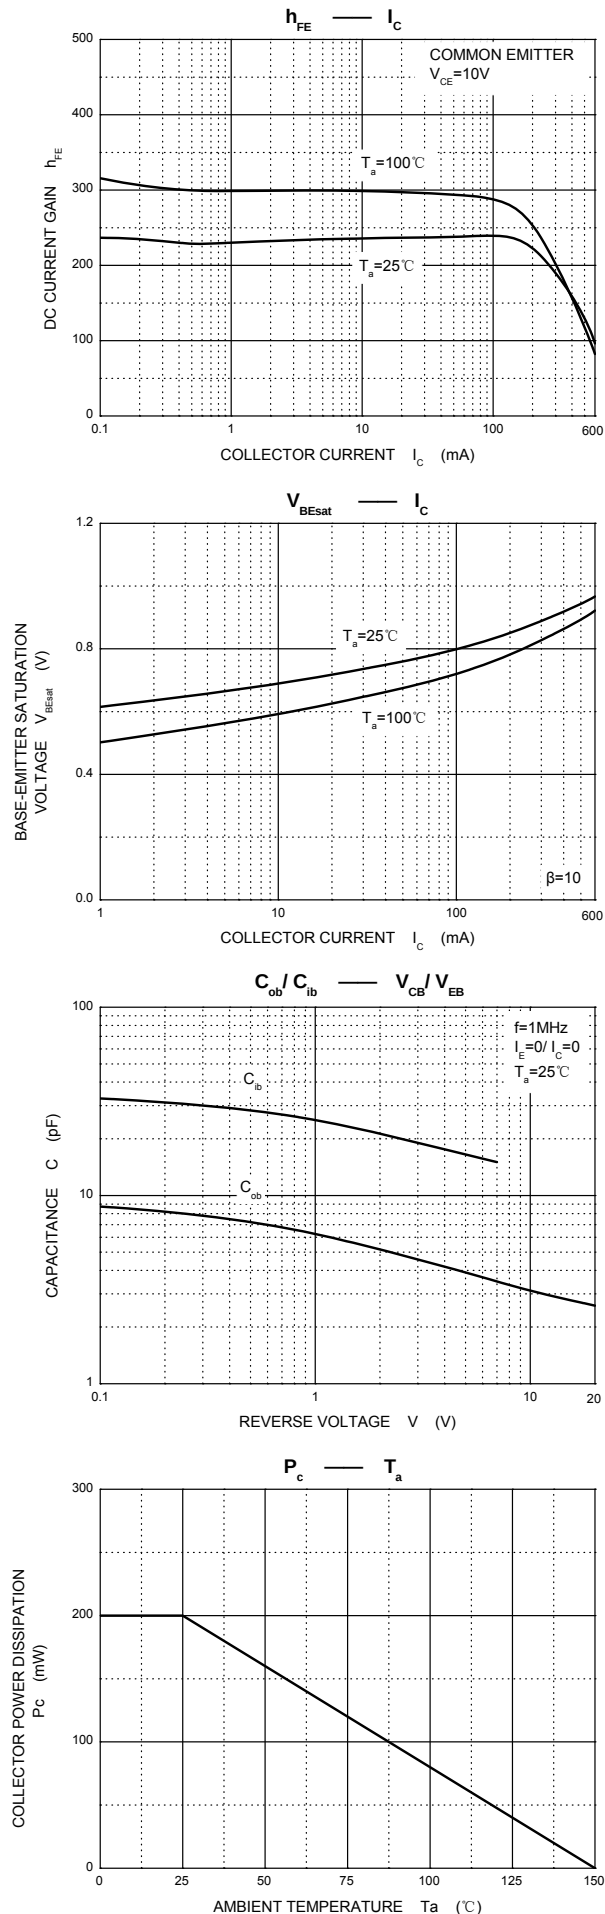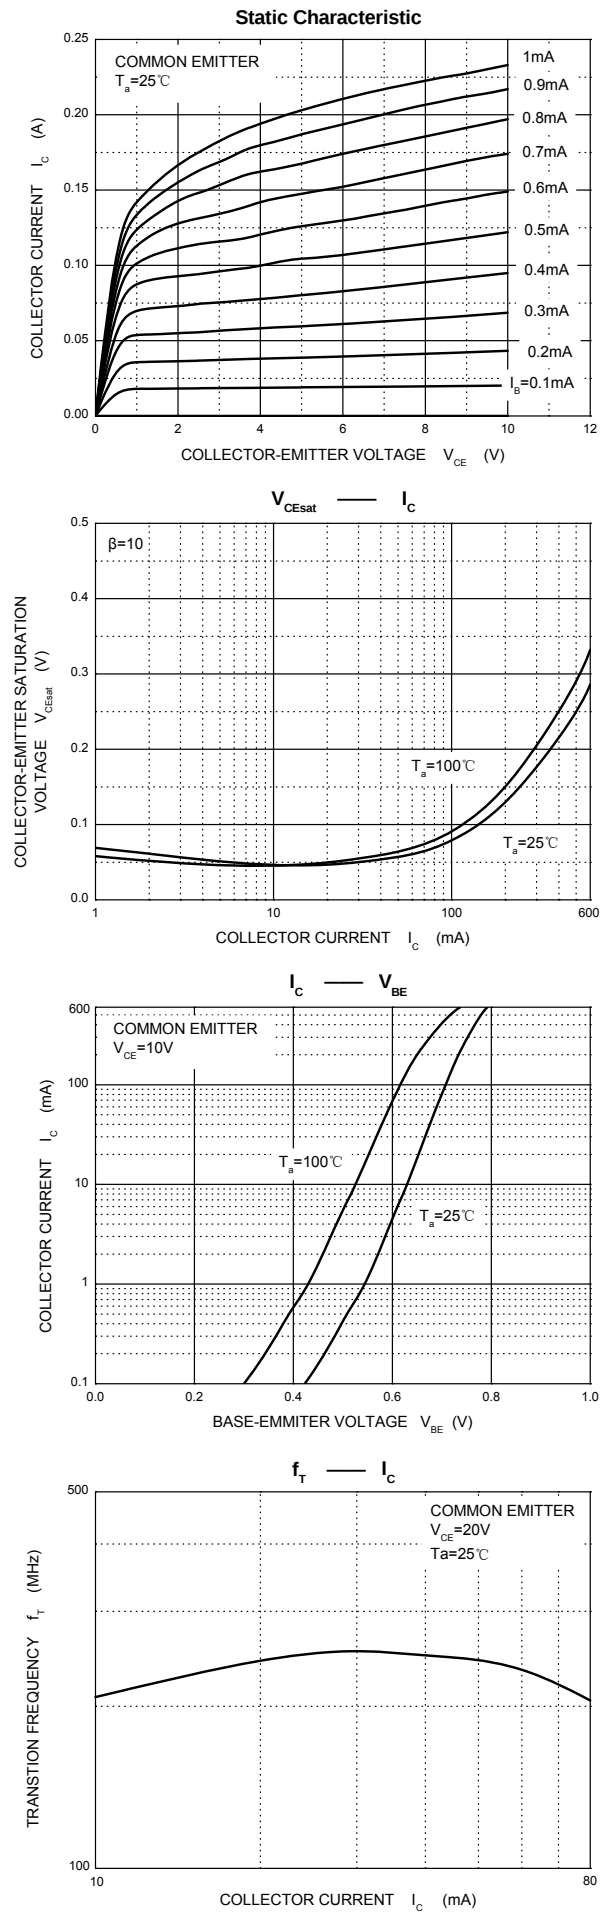


SOT-23-6L Package Outline Dimensions

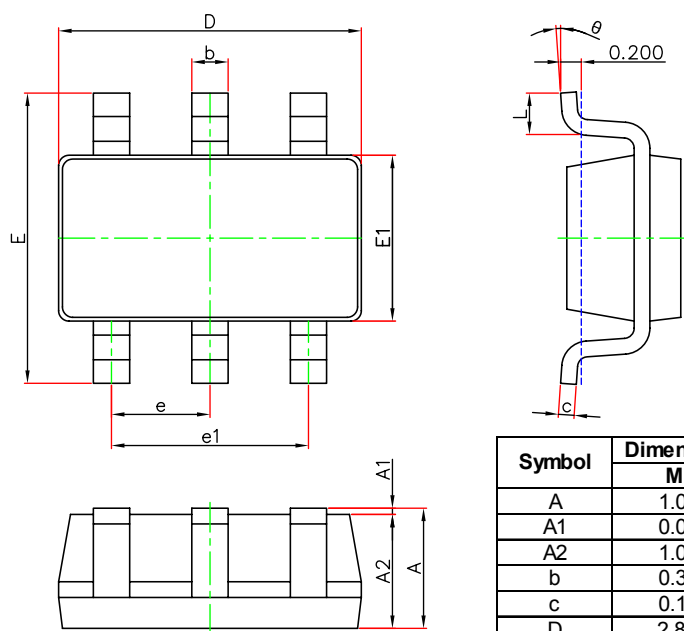

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°


SOT-23-6L Suggested Pad Layout

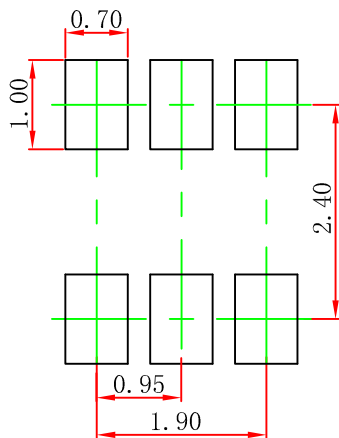

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

SOT-23-6L Tape and Reel


SOT-23-6L Embossed Carrier Tape

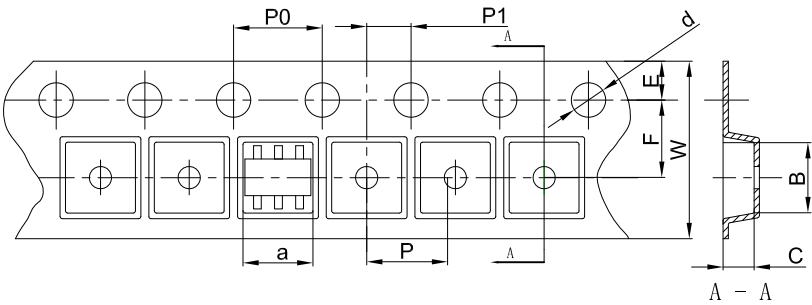


Packaging Description:
SOT-23-6L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 18.0cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	a	B	C	d	E	F	P0	P	P1	W
SOT-23-6L	3.17	3.23	1.37	Ø1.55	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23-6L Tape Leader and Trailer

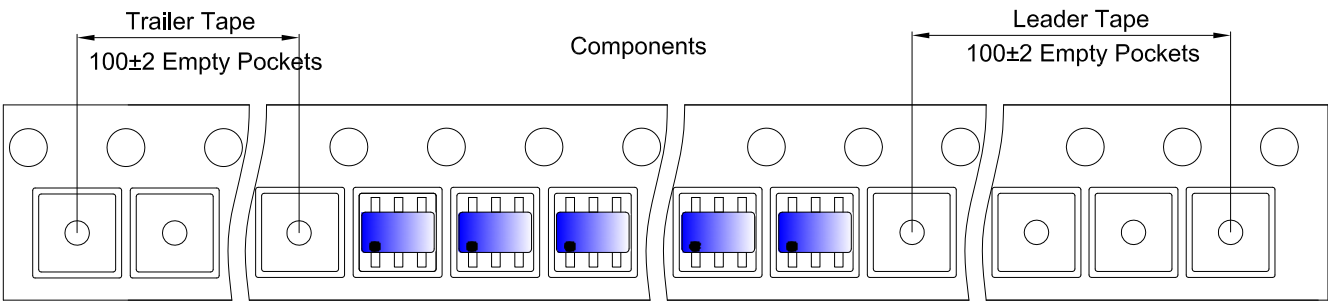

SOT-23-6L Reel

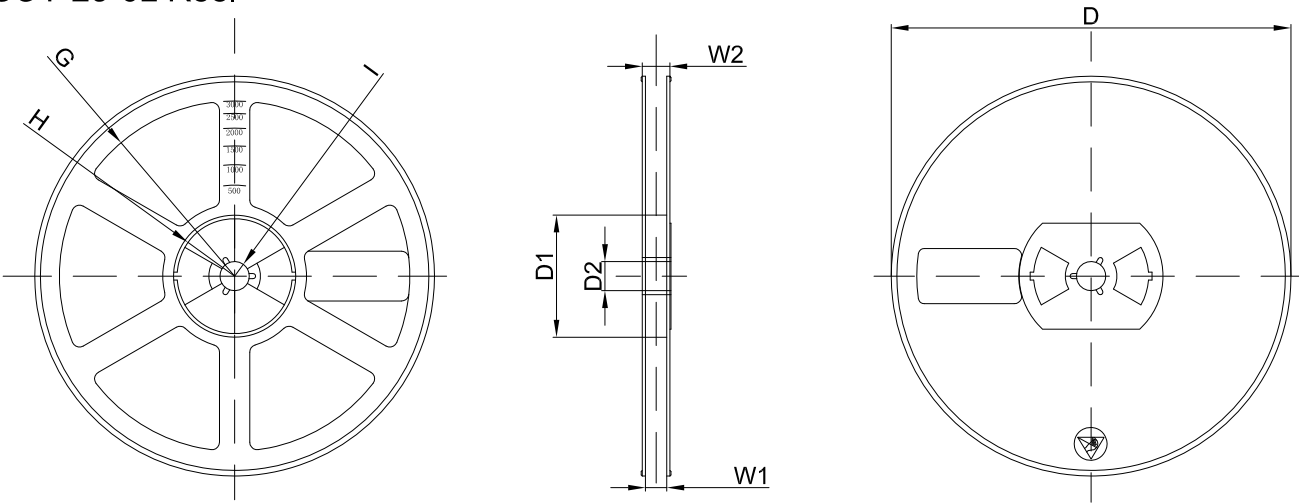

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø180.00	60.00	13.00	R78.00	R25.60	R6.50	9.50	13.10

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	